arXiv:1201.1387v1 [math.OC] 6 Jan 2012

Feedback stabilization of discrete-time quantum systems subject to non-demolition measurements with imperfections and delays *

H. Amini† A. Somaraju‡ I. Dotsenko§ C. Sayrin¶

M. Mirrahimi‖ P. Rouchon**

January 6, 2012

Abstract

This work develops the mathematical methods underlying a recent quantum feedback experiment stabilizing photon-number states. It considers a controlled system whose quantum state, a finite dimensional density operator, is governed by a discrete-time nonlinear Markov process. In open-loop, the measurements are assumed to be quantum non-demolition (QND) measurements. This Markov process admits thus a set of stationary pure states associated to an orthonormal basis of the underlying Hilbert space. These stationary states provide martingales that are crucial to characterizing the open-loop stability: under simple and suggestive assumptions, almost all trajectories converge to one of these stationary states; the probability to converge to a stationary state is given by its overlap with the initial quantum state. From these open-loop martingales, we construct a supermartingale whose parameters are given by inverting a Metzler matrix characterizing the impact of the control input on

---

*This work was supported in part by the "Agence Nationale de la Recherche" (ANR), Project QUSCO-INCA, Projet Jeunes Chercheurs EPOQ2 number ANR-09-JCJC-0070 and Projet Blanc CQUID number 06-3-13957, and by the EU under the IP project AQUTE and ERC project DECLIC. This work was also performed during the post-doctoral fellowship of A. Somaraju at Mines-ParisTech and INRIA during academic year 2010/2011.

†Centre Automatique et Systèmes, Mines ParisTech, 60 Boulevard Saint-Michel, 75272 Paris Cedex 6, France. `hadis.amini@mines-paristech.fr`

‡B-Phot, Department of Applied Physics and Photonics, Vrije Universiteit Brussel, Pleinlaan no. 2, Brussels - 1050 (Belgium) `asomaraj@b-phot.org`

§Laboratoire Kastler Brossel, ENS, UPMC-Paris 6, CNRS, 24 rue Lhomond, 75005 Paris, France. `igor.dotsenko@lkb.ens.fr`

¶Laboratoire Kastler Brossel, ENS, UPMC-Paris 6, CNRS, 24 rue Lhomond, 75005 Paris, France. `clement.sayrin@lkb.ens.fr`

‖INRIA Paris-Rocquencourt, Domaine de Voluceau, BP 105, 78153 Le Chesnay Cedex, France. `mazyar.mirrahimi@inria.fr`

**Centre Automatique et Systèmes, Mines ParisTech, 60 Boulevard Saint-Michel, 75272 Paris Cedex 6, France. `pierre.rouchon@mines-paristech.fr`

the Kraus operators defining the Markov process. This supermartingale measures the “distance” between the current quantum state and the goal state chosen from one of the open-loop stationary pure states. At each step, the control input minimizes the conditional expectation of this supermartingale. It is proven that the resulting feedback scheme stabilizes almost surely towards the goal state whatever the initial quantum state. This state feedback takes into account a known constant delay of arbitrary length in the control loop. This control strategy is proved to remain also convergent when the state is replaced by its estimate based on a quantum filter. It relies on measurements that can be corrupted by random errors with conditional probabilities described by a known left stochastic matrix. Closed-loop simulations corroborated by experimental data illustrate the interest of such nonlinear feedback scheme for the photon box, a cavity quantum electro-dynamics system.

1 Introduction

Manipulating quantum systems allows one to accomplish tasks far beyond the reach of classical devices. Quantum information is paradigmatic in this sense: quantum computers will substantially outperform classical machines for several problems [13]. Though significant progress has been made recently, severe difficulties still remain, among which decoherence is certainly the most important. Large systems consisting of many qubits must be prepared in fragile quantum states, which are rapidly destroyed by their unavoidable coupling to the environment. Measurement-based feedback and coherent feedback are possible routes towards the preparation, protection and stabilization of such states. For coherent feedback strategy, the controller is also a quantum system coupled to the original one (see [8, 10] and the references herein). This paper is devoted to measurement-based feedback where the controller and the control input are classical objects [20]. The results presented here are directly inspired by a recent experiment [16, 15] demonstrating that such a quantum feedback scheme achieves the on-demand preparation and stabilization of non-classical states of a microwave field.

Following [7] and relying on continuous-time Lyapunov techniques exploited in [12], an initial measurement-based feedback was proposed in [6]. This feedback scheme stabilizes photon-number states (Fock states) of a microwave field (see e.g. [9] for a physical description of such cavity quantum electro-dynamics (CQED) systems). The controller involves firstly a quantum filter estimating the state of the field from discrete-time measurements performed by probe atoms, and secondly a stabilizing state-feedback control relying on Lyapunov techniques. The discrete-time behavior was crucial for a possible real-time implementation of such kind of controllers. Closed-loop simulations reported in [6] have been confirmed by the stability analysis performed in [2]. In the experimental implementation [16, 15], the state-feedback has been improved by a better choice of Lyapunov function. The goal of this paper is to present, for a class of discrete-time quantum systems, the mathematical methods underlying such improved Lyapunov design. Our main result is given in Theorem 3.2 where closed-loop convergence is proved in presence of delays and measurement imperfections.

The state-feedback scheme may be applied to generic discrete-time finite-dimension quantum systems using *controlled* measurements in order to deterministically prepare and stabilize the system at some pre-specified goal state. These systems are governed by nonlinear controlled Markov processes where the jumps are measured and the jump probabilities are state-dependent. These systems are subject to a discrete-time sequence of positive operator valued measures (POVMs [13, 9]) and we use these POVMs to stabilize the system at the goal state. By controlled measurements, we mean that at each time step the chosen POVM is not fixed but is a function of some classical control signal u, similarly to [19]. We however assume that when the control u is zero, the chosen POVM performs a quantum non-demolition (QND) measurement [9, 20] for some orthonormal basis that includes the goal state. The feedback-law is based on a set of Lyapunov functions made of linear combination of the martingales attached to these QND measurements and that determines a "distance" between the goal state and the current state. The parameters of these Lyapunov functions are given by inverting Metzler matrices characterizing the impact of the control input on the Kraus operators defining the Markov processes and POVMs. The (graph theoretic) properties of the Metzler matrices are used to construct families of open-loop supermartingales that become strict supermartingales in closed-loop. This fact provides directly the convergence to the goal state without using invariance principle.

A common problem that occurs in quantum feedback control is that of delays between the measurement process and the control process [14]. In this paper we demonstrate, using a predictive quantum filter, that the proposed scheme works even in the presence of delays. Convergence analysis is done for perfect and imperfect measurements. For imperfect measurements, the dynamics of the system are governed by a nonlinear Markovian chain given in [17]. In both the perfect and imperfect measurement situations we recover the quantum separation principle as originally stated in [5]: if the quantum filter associated with the measurement process converges to the goal (pure) state then so does the actual state of the system. This separation principle implies that the feedback may be designed only knowing the state of the quantum filter and measurement outcomes in spite of not knowing the actual state of the system due to the imperfections in measurement.

The paper is organized as follows. In section 2, we describe the finite dimensional Markovian model together with the main modeling assumptions in the case of perfect measurements. Subsection 2.2 is devoted to the open-loop behavior (Theorem 2.1) which can be seen as a non-deterministic protocol for preparing a finite number of isolated and orthogonal quantum states. In subsection 2.3, we present the main ideas underlying the construction of these control-Lyapunov functions W_ϵ: a Metzler matrix attached to the second derivative of the measurement operators and a technical lemma assuming this Meztler matrix is irreducible. Finally Theorem 2.2 describes the stabilizing feedback derived from W_ϵ. The same analysis is done for the case of imperfect measurements in Section 3. We propose a brief discussion on the considered quantum filter and by proving a rather general separation principle (theorems 2.3 (resp. 3.2)) for perfect measurements (resp. for imperfect measurements)). Section 4 is devoted to the experimental implementation that has been done at Laboratoire Kastler-Brossel at Ecole Normale Supérieure. Closed-loop simulations and experimental data complementary to those reported in [16, 15] are presented.

2 Perfect measurements

2.1 The nonlinear Markov model

We consider a finite dimensional quantum system (the underlying Hilbert space $\mathcal{H} = \mathbb{C}^d$ is of dimension $d > 0$) being measured through a generalized measurement procedure at discrete time intervals. The dynamics of such discrete time quantum systems are described by a nonlinear controlled Markov chain with a structure derived from quantum physics. We just sketch here this structure from a mathematical viewpoint. In this Section, we suppose perfect measurements which means that the detectors are ideal and also that there is no decoherence.

The system state is described by a density operator ρ belonging to $\mathcal{D}$ the set of positive, Hermitian matrices of trace one:

$$\mathcal{D} := \{\rho \in \mathbb{C}^{d\times d} \mid \quad \rho = \rho^\dagger, \quad \mathrm{Tr}\,(\rho) = 1, \quad \rho \geq 0\}.$$

To each measurement outcome $\mu \in \{1, \ldots, m\}$, $m > 0$ being the numbers of possible outcomes, is attached the Kraus operator $M_\mu^u \in \mathbb{C}^{d\times d}$ depending on μ and also on a scalar control input $u \in \mathbb{R}$. For each u, these Kraus operators $(M_\mu^u)_{\mu\in\{1,\ldots,m\}}$ satisfy the constraint $\sum_{\mu=1}^m {M_\mu^u}^\dagger M_\mu^u = \mathbf{I}$ where $\mathbf{I}$ is the identity matrix. They are attached to the Kraus map $\mathbb{K}^u$ defined by

$$\mathcal{D} \ni \rho \mapsto \mathbb{K}^u(\rho) = \sum_{\mu=1}^m M_\mu^u \rho {M_\mu^u}^\dagger \in \mathcal{D}. \tag{1}$$

The random evolution of the state $\rho_k \in \mathcal{D}$ at time step k is modeled through the following Markov process:

$$\rho_{k+1} = \mathbb{M}_{\mu_k}^{u_{k-\tau}}(\rho_k), \tag{2}$$

where

- $u_{k-\tau}$ is the control at step k, subject to a delay of $\tau > 0$ steps. This delay is usually due to delays in the measurement process that can also be seen as delays in the control process,
- μ_k is a random variable taking values μ in $\{1, \cdots, m\}$ with probability $p_{\mu,\rho_k}^{u_{k-\tau}} = \mathrm{Tr}\left(M_\mu^{u_{k-\tau}} \rho_k {M_\mu^{u_{k-\tau}}}^\dagger\right)$,

- for each μ, $\mathbb{M}_\mu^u$ is the super-operator

$$\mathbb{M}_\mu^u : \quad \rho \mapsto \frac{M_\mu^u \rho M_\mu^{u\dagger}}{\mathrm{Tr}\left(M_\mu^u \rho M_\mu^{u\dagger}\right)} \in \mathcal{D}$$

  defined for $\rho \in \mathcal{D}$ such that $p_{\mu,\rho}^u = \mathrm{Tr}\left(M_\mu^u \rho M_\mu^{u\dagger}\right) \neq 0$.

We state below three assumptions that we will use in the paper.

Assumption 1. *For $u = 0$, the measurement operators M_μ^0 are diagonal in the same orthonormal basis $\{\,|n\rangle \mid n \in \{1, \cdots, d\}\}$, therefore $M_\mu^0 = \sum_{n=1}^d c_{\mu,n} |n\rangle \langle n|$ with $c_{\mu,n} \in \mathbb{C}$.*

Assumption 2. *For all $n_1 \neq n_2$ in $\{1, \cdots, d\}$, there exists $\mu \in \{1, \cdots, m\}$ such that $|c_{\mu,n_1}|^2 \neq |c_{\mu,n_2}|^2$.*

Assumption 3. *The measurement operators M_μ^u are C^2 functions of u.*

Assumption 1 means that when the control is zero, the considered measurement process achieves a Quantum Non Demolition (QND) measurement for the physical observables given by projection operators over the states $\big\{|n\rangle \mid \quad n \in \{1, \cdots, d\}\big\}$. This implies that for $u_k \equiv 0$, any $\rho = |n\rangle \langle n|$ corresponding to the orthogonal projector on the basis vector $|n\rangle$, $n \in \{1, \ldots, d\}$, is a fixed point of the Markov process (2). Since the operators M_μ^0 must satisfy $\sum_{\mu=1}^m M_\mu^{0\dagger} M_\mu^0 = \mathbf{I}$, we have, according to assumption 1, that $\sum_{\mu=1}^m |c_{\mu,n}|^2 = 1$ for all $n \in \{1, \cdots, d\}$.

Assumption 2 means that there exists a μ such that the statistics when $u_k \equiv 0$ for obtaining the measurement result μ are different for the fixed points $|n_1\rangle \langle n_1|$ and $|n_2\rangle \langle n_2|$. This follows by noting that $\mathrm{Tr}\left(M_\mu^0 |n\rangle \langle n| M_\mu^{0\dagger}\right) = |c_{\mu,n}|^2$ for $n \in \{1, \cdots, d\}$.

2.2 Convergence of the open-loop dynamics

When the control input vanishes ($u \equiv 0$), the dynamics are simply given by

$$\rho_{k+1} = \mathbb{M}_{\mu_k}^0(\rho_k) \tag{3}$$

where μ_k is a random variable with values in $\{1, \ldots, m\}$. The probability p_{μ,ρ_k}^0 to have $\mu_k = \mu$ depends on ρ_k: $p_{\mu,\rho_k}^0 = \mathrm{Tr}\left(M_\mu^0 \rho_k M_\mu^{0\dagger}\right)$. The open-loop asymptotic behavior is characterized by the following theorem.

Theorem 2.1. *Consider a Markov process ρ_k obeying the dynamics of* (3) *with an initial condition ρ_0 in $\mathcal{D}$. Then*

- *with probability one, ρ_k converges to one of the d states $|n\rangle \langle n|$ with $n \in \{1, \cdots, d\}$,*
- *the probability of convergence towards the state $|n\rangle \langle n|$ depends only on the initial condition ρ_0 and is given by $\langle n| \rho_0 |n\rangle$.*

This theorem is already proved in [2, 3] and also in [4] in a slightly different formulation. We recall the proof proposed in [3] since it uses a Lyapunov function that will be exploited in closed-loop.

Proof. For any $n \in \{1, \ldots, d\}$, $\langle n| \rho |n\rangle$ is a martingale. This results from

$$\begin{aligned}\mathbb{E}\left(\langle n| \rho_{k+1} |n\rangle |\rho_k\right) &= \sum_{\mu=1}^{m} \operatorname{Tr}\left(M_\mu^0 \rho_k {M_\mu^0}^\dagger\right) \langle n| \mathbb{M}_\mu^0(\rho_k) |n\rangle \\ &= \sum_{\mu=1}^{m} \langle n| M_\mu^0 \rho_k {M_\mu^0}^\dagger |n\rangle = \langle n| \sum_{\mu=1}^{m} {M_\mu^0}^\dagger M_\mu^0 \rho_k |n\rangle = \langle n| \rho_k |n\rangle ,\end{aligned}$$

where we have used that M_μ^0 and $|n\rangle\langle n|$ commute and $\sum_{\mu=1}^m {M_\mu^0}^\dagger M_\mu^0 = \mathbf{I}$.

Take the function

$$V(\rho) := -\sum_{n=1}^{d} \frac{\left(\langle n| \rho |n\rangle\right)^2}{2}. \tag{4}$$

The function V being concave and each $\langle n| \rho |n\rangle$ being a martingale, we infer that $V(\rho)$ is a supermartingale

$$\mathbb{E}\left(V(\rho_{k+1})|\rho_k\right) \leq V(\rho_k).$$

More precisely, we have

$$\mathbb{E}\left(V(\rho_{k+1})|\rho_k\right) = -\tfrac{1}{2} \sum_{n=1}^{d} \sum_{\mu \in S_{\rho_k}^0} \operatorname{Tr}\left(M_\mu^0 \rho_k {M_\mu^0}^\dagger\right) \left(\tfrac{\langle n| M_\mu^0 \rho_k {M_\mu^0}^\dagger |n\rangle}{\operatorname{Tr}\left(M_\mu^0 \rho_k {M_\mu^0}^\dagger\right)}\right)^2,$$

with $S_{\rho_k}^0 = \left\{\mu \in \{1, \cdots, m\} \mid \operatorname{Tr}\left(M_\mu^0 \rho_k {M_\mu^0}^\dagger\right) \neq 0\right\}$. We have the identity

$$\begin{aligned}\sum_{\mu \in S_{\rho_k}^0} \operatorname{Tr}\left(M_\mu^0 \rho_k {M_\mu^0}^\dagger\right) \left(\tfrac{\langle n| M_\mu^0 \rho_k {M_\mu^0}^\dagger |n\rangle}{\operatorname{Tr}\left(M_\mu^0 \rho_k {M_\mu^0}^\dagger\right)}\right)^2 &= \left(\sum_{\mu \in S_{\rho_k}^0} \operatorname{Tr}\left(M_\mu^0 \rho_k {M_\mu^0}^\dagger\right) \tfrac{\langle n| M_\mu^0 \rho_k {M_\mu^0}^\dagger |n\rangle}{\operatorname{Tr}\left(M_\mu^0 \rho_k {M_\mu^0}^\dagger\right)}\right)^2 \\ + \tfrac{1}{2} \sum_{\mu,\nu \in S_{\rho_k}^0} \operatorname{Tr}\left(M_\mu^0 \rho_k {M_\mu^0}^\dagger\right) \operatorname{Tr}\left(M_\nu^0 \rho_k {M_\nu^0}^\dagger\right) &\left(\tfrac{\langle n| M_\mu^0 \rho_k {M_\mu^0}^\dagger |n\rangle}{\operatorname{Tr}\left(M_\mu^0 \rho_k {M_\mu^0}^\dagger\right)} - \tfrac{\langle n| M_\nu^0 \rho_k {M_\nu^0}^\dagger |n\rangle}{\operatorname{Tr}\left(M_\nu^0 \rho_k {M_\nu^0}^\dagger\right)}\right)^2,\end{aligned}$$

where we have used $\sum_{\mu \in S_{\rho_k}^0} \operatorname{Tr}\left(M_\mu^0 \rho_k {M_\mu^0}^\dagger\right) = 1$.

The above identity yields $\mathbb{E}\left(V(\rho_{k+1})|\rho_k\right) - V(\rho_k) = -Q(\rho_k)$ with

$$Q(\rho) = \tfrac{1}{4} \sum_{n=1}^{d} \sum_{\mu,\nu \in S_\rho^0} \operatorname{Tr}\left(M_\mu^0 \rho {M_\mu^0}^\dagger\right) \operatorname{Tr}\left(M_\nu^0 \rho {M_\nu^0}^\dagger\right) \left(\tfrac{|c_{\mu,n}|^2 \langle n|\rho|n\rangle}{\operatorname{Tr}\left(M_\mu^0 \rho {M_\mu^0}^\dagger\right)} - \tfrac{|c_{\nu,n}|^2 \langle n|\rho|n\rangle}{\operatorname{Tr}\left(M_\nu^0 \rho {M_\nu^0}^\dagger\right)}\right)^2.$$

We have used that $\langle n| \mathbb{M}_\mu^0(\rho) |n\rangle = \frac{|c_{\mu,n}|^2 \langle n|\rho|n\rangle}{\operatorname{Tr}\left(M_\mu^0 \rho {M_\mu^0}^\dagger\right)}$ and $\sum_{\mu \in S_{\rho_k}^0} \langle n| M_\mu^0 \rho {M_\mu^0}^\dagger |n\rangle = \langle n| \rho |n\rangle$. Since $Q \geq 0$, $V(\rho_k)$ is a supermartingale. Note that the sum in the definition of $Q(\rho)$ is over all $\mu, \nu \in S_\rho^0$. However, we can assume that the sum is actually over all μ, ν in $\{1, \cdots, m\}$ by observing the following facts. For any μ, ν, take the mapping

$$\rho \mapsto \mathrm{Tr}\left(M_\mu^0 \rho M_\mu^{0\dagger}\right) \mathrm{Tr}\left(M_\nu^0 \rho M_\nu^{0\dagger}\right) \left(\tfrac{|c_{\mu,n}|^2 \langle n|\rho|n\rangle}{\mathrm{Tr}\left(M_\mu^0 \rho M_\mu^{0\dagger}\right)} - \tfrac{|c_{\nu,n}|^2 \langle n|\rho|n\rangle}{\mathrm{Tr}\left(M_\nu^0 \rho M_\nu^{0\dagger}\right)} \right)^2$$

defined only when $\mathrm{Tr}\left(M_\mu^0 \rho M_\mu^{0\dagger}\right) \mathrm{Tr}\left(M_\nu^0 \rho M_\nu^{0\dagger}\right) > 0$. Since this mapping is positive and bounded by $\rho \mapsto \mathrm{Tr}\left(M_\mu^0 \rho M_\mu^{0\dagger}\right) \mathrm{Tr}\left(M_\nu^0 \rho M_\nu^{0\dagger}\right)$, it can be extended by continuity to any $\rho \in \mathcal{D}$ by taking a null value when $\mathrm{Tr}\left(M_\mu^0 \rho M_\mu^{0\dagger}\right) \mathrm{Tr}\left(M_\nu^0 \rho M_\nu^{0\dagger}\right) = 0$. Thus

$$Q(\rho) = \tfrac{1}{4} \sum_{n=1}^{d} \sum_{\mu,\nu=1}^{m} \mathrm{Tr}\left(M_\mu^0 \rho M_\mu^{0\dagger}\right) \mathrm{Tr}\left(M_\nu^0 \rho M_\nu^{0\dagger}\right) \left(\tfrac{|c_{\mu,n}|^2 \langle n|\rho|n\rangle}{\mathrm{Tr}\left(M_\mu^0 \rho M_\mu^{0\dagger}\right)} - \tfrac{|c_{\nu,n}|^2 \langle n|\rho|n\rangle}{\mathrm{Tr}\left(M_\nu^0 \rho M_\nu^{0\dagger}\right)} \right)^2 \tag{5}$$

is continuously defined for any $\rho \in \mathcal{D}$ and still satisfies

$$\mathbb{E}\left(V(\rho_{k+1})|\rho_k\right) - V(\rho_k) = -Q(\rho_k), \forall \rho_k \in \mathcal{D}.$$

By Theorem A.1 of the Appendix, the ω-limit set is a subset of $\{\rho \in \mathcal{D} | \quad Q(\rho) = 0\}$. The condition $Q = 0$ implies that, for all n, μ, ν

$$\mathrm{Tr}\left(M_\nu^0 \rho M_\nu^{0\dagger}\right) \langle n| M_\mu^0 \rho M_\mu^{0\dagger} |n\rangle = \mathrm{Tr}\left(M_\mu^0 \rho M_\mu^{0\dagger}\right) \langle n| M_\nu^0 \rho M_\nu^{0\dagger} |n\rangle.$$

Taking the sum over all ν, we get for all n and μ,

$$\langle n| M_\mu^0 \rho M_\mu^{0\dagger} |n\rangle = \mathrm{Tr}\left(M_\mu^0 \rho M_\mu^{0\dagger}\right) \langle n| \rho |n\rangle$$

These relations read ($\rho_{n',n'} = \langle n'| \rho |n'\rangle$)

$$|c_{\mu,n}|^2 \rho_{n,n} = \left(\sum_{n'} |c_{\mu,n'}|^2 \rho_{n',n'} \right) \rho_{n,n}. \tag{6}$$

Since $\mathrm{Tr}\left(\rho\right) = 1$ and $\rho \geq 0$, there exists $n^* \in \{1, \ldots, d\}$ such that $\rho_{n^*,n^*} > 0$. Thus (6) with arbitrary μ and $n = n^*$ gives $|c_{\mu,n^*}|^2 = \sum_{n'} |c_{\mu,n'}|^2 \rho_{n',n'}$. Consequently for all μ and n, (6) reads

$$(|c_{\mu,n}|^2 - |c_{\mu,n^*}|^2)\rho_{n,n} = 0.$$

By assumption 2, $\rho_{n,n} = 0$ as soon as $n \neq n^*$ and thus $\rho = |n^*\rangle \langle n^*|$. This closes the proof of the first assertion.

We have shown that the probability measure associated to the random variable ρ_k converges weakly to the probability measure $\sum_{n=1}^{d} p_n \delta_{|n\rangle\langle n|}$, where $\delta_{|n\rangle\langle n|}$ denotes the Dirac measure at $|n\rangle \langle n|$ and p_n is the probability of convergence towards $|n\rangle \langle n|$. In particular, we have $\mathbb{E}\left(\langle n| \rho_k |n\rangle\right) \longrightarrow p_n$. But $\langle n| \rho_k |n\rangle$ is a martingale thus $\mathbb{E}\left(\langle n| \rho_k |n\rangle\right) = \mathbb{E}\left(\langle n| \rho_0 |n\rangle\right)$ and consequently $p_n = \langle n| \rho_0 |n\rangle$. □

2.3 Feedback stabilization

2.3.1 Design of the control-Lyapunov function

Theorem 2.1 means that the open-loop dynamics is stable in the sense that each realization ρ_k converges to one of the pure state $|n\rangle \langle n|$ where $n \in \{1, \dots, d\}$ is stochastic with probability equals to $\langle n| \rho_0 |n\rangle$ since $\langle n| \rho |n\rangle$ is a martingale. The control goal is to made this convergence deterministic toward a chosen $\bar{n} \in \{1, \dots, d\}$ playing the role of controller set point. The control design is based on Lyapunov techniques exploiting the d open-loop martingales $\langle n| \rho |n\rangle$. In [6, 2] we take

$$1 - \langle \bar{n}| \rho |\bar{n}\rangle = \sum_{n \neq \bar{n}} \langle n| \rho |n\rangle$$

as control Lyapunov function and propose a state feedback law transforming this open-loop martingale into a closed-loop supermartingale. In [3, 18], the feedback relies on Lyapunov functions $V_0(\rho)$ of the form

$$V_0(\rho) = \sum_{n=1}^{d} \sigma_n \langle n| \rho |n\rangle$$

where the real coefficients σ_n are strictly positive except $\sigma_{\bar{n}} = 0$. Since the σ_n are all different in general, such Lyapunov functions achieve a better discrimination between the open-loop fixed points $|n\rangle \langle n|$: a large σ_n indicates that the control effort needed to steer $|n\rangle \langle n|$ towards $|\bar{n}\rangle \langle \bar{n}|$ will be important. We generalize here this Lyapunov design for arbitrary controlled Kraus operators M_μ^u that cannot be decomposed into QND measurement operators M_μ^0 followed by a unique controlled unitary operator D_u with $D_0 = \mathbf{I}$ as assumed in [3, 18] where $M_\mu^u \equiv D_u M_\mu^0$.

More precisely, these positive coefficients have to ensure that for any $n \neq \bar{n}$, the second-order u-derivative of $V_0(\mathbb{K}^u(|n\rangle \langle n|))$ at $u = 0$ is strictly negative ($\mathbb{K}^u$ is the Kraus map defined by (1)). This yields to a set of linear equations in σ_n that can be solved by inverting an irreducible Metzler matrix (see lemma 2.2). Once the σ_n's satisfy these constraints, the stabilizing feedback law proposed in theorem 2.2 is based on the open-loop supermartingale

$$V_\epsilon(\rho) = V_0(\rho) - \tfrac{\epsilon}{2} \sum_{n=1}^{d} (\langle n| \rho |n\rangle)^2$$

where the sum of quadratic terms has been previously used as supermartingale during the proof of the open-loop convergence addressed by theorem 2.1. For $\epsilon > 0$ small enough, $V_\epsilon(\rho)$ still admits a unique global minimum at $\rho = |\bar{n}\rangle \langle \bar{n}|$; for u close to 0, $u \mapsto V_\epsilon(\mathbb{K}^u(|n\rangle \langle n|))$ is strongly concave for any $n \neq \bar{n}$ and strongly convex for $n = \bar{n}$. This indicates that V_ϵ is a good candidate as control-Lyapunov function.

It remains to explain how to take into account the delay τ explicitly into the Lyapunov design relying of $V_\epsilon(\rho)$. Take $(\rho_k, u_{k-1}, \cdots, u_{k-\tau})$ as state at step k.

More precisely denote by $\chi = (\rho, \beta_1, \cdots, \beta_\tau)$ this state where β_l stands for the control input u delayed l steps. Then the state form of the delay dynamics (2) is governed by the following Markov chain

$$\begin{cases} \rho_{k+1} & = \mathbb{M}_{\mu_k}^{\beta_{\tau,k}}(\rho_k) \\ \beta_{1,k+1} & = u_k \\ \beta_{2,k+1} & = \beta_{1,k} \\ & \vdots \\ \beta_{\tau,k+1} & = \beta_{\tau-1,k}. \end{cases} \tag{7}$$

The goal is to design a feedback law $u_k = f(\chi_k)$ that globally stabilizes this Markov chain towards a chosen target state $\bar{\chi} = (|\bar{n}\rangle \langle \bar{n}|, 0, \ldots, 0)$ for some $\bar{n} \in \{1, \cdots, d\}$. In theorem 2.2 we show how to design a feedback relying on the control Lyapunov function $W_\epsilon(\chi) = V_\epsilon(\mathbb{K}^{\beta_1}(\mathbb{K}^{\beta_2}(\ldots\ldots \mathbb{K}^{\beta_\tau}(\rho)\ldots)))$.

The construction of $V_0(\rho)$ relies on the following lemmas.

Lemma 2.1. *Consider the $d \times d$ Metzler matrix R defined by*

$$R_{n_1,n_2} = \sum_\mu \left(2 \left| \langle n_1 | \tfrac{dM_\mu^{u\dagger}}{du}\big|_{u=0} |n_2\rangle \right|^2 + 2\delta_{n_1,n_2} \Re\big(c_{\mu,n_1} \langle n_1| \tfrac{d^2 M_\mu^{u\dagger}}{du^2}\big|_{u=0} |n_2\rangle \big) \right).$$

When $R \neq 0$, the non negative $P = \mathbf{I} - R/Tr(R)$ is a right stochastic matrix.

Proof. For $n_1 \neq n_2$, $R_{n_1,n_2} \geq 0$. Thus R is a Metzler matrix. Let us prove that the sum of each row vanishes. This results from identity $\sum_\mu M_\mu^{u\dagger} M_\mu^u = \mathbf{I}$. Deriving twice versus u the relation

$$1 = \sum_\mu \langle n_1| M_\mu^{u\dagger} M_\mu^u |n_1\rangle = \sum_{\mu,n_2} \langle n_1| M_\mu^{u\dagger} |n_2\rangle \langle n_2| M_\mu^u |n_1\rangle$$

yields

$$\sum_{\mu,n_2} 2 \langle n_1| \tfrac{dM_\mu^{u\dagger}}{du} |n_2\rangle \langle n_2| \tfrac{dM_\mu^u}{du} |n_1\rangle + \langle n_1| \tfrac{d^2 M_\mu^{u\dagger}}{du^2} |n_2\rangle \langle n_2| M_\mu^u |n_1\rangle$$
$$+ \langle n_1| M_\mu^{u\dagger} |n_2\rangle \langle n_2| \tfrac{d^2 M_\mu^u}{du^2} |n_1\rangle = 0.$$

Since for $u = 0$, $\langle n_2| M_\mu^0 |n_1\rangle = \delta_{n_1,n_2} c_{\mu,n_1}$ the above sum corresponds to $\sum_{n_2} R_{n_1,n_2}$. Therefore, the diagonal elements of R are non positive. If $R \neq 0$, then $\mathrm{Tr}\,(R) < 0$ and the matrix $P = \mathbf{I} - R/\mathrm{Tr}\,(R)$ is well defined with non-negative entries. Since the sum of each row of R vanished, the sum of each row of P is equal to 1. Thus P is a right stochastic matrix. □

Lemma 2.2. *Assume the graph of the matrix R defined in Lemma 2.1 is strongly connected, i.e. for any $n, n' \in \{1, \ldots, d\}$, $n \neq n'$, there exists a chain of r distinct elements $(n_j)_{j=1,\ldots,r}$ of $\{1, \ldots, d\}$ such that $n_1 = n$, $n_r = n'$ and for any $j = 1, \ldots r-1$, $R_{n_j,n_{j+1}} \neq 0$. Take $\bar{n} \in \{1, \ldots, d\}$. Then exist $d-1$ strictly positive real numbers e_n, $n \in \{1, \ldots, d\}/\{\bar{n}\}$, such that*

- *for any reals* λ_n, $n \in \{1, \ldots, d\}/\{\bar{n}\}$, *there exists a unique vector* $\sigma = (\sigma_n)_{n \in \{1,\ldots,d\}}$ *of* $\mathbb{R}^d$ *with* $\sigma_{\bar{n}} = 0$ *such that* $R\sigma = \lambda$ *where* λ *is the vector of* $\mathbb{R}^d$ *of components* λ_n *for* $n \in \{1, \ldots, d\}/\{\bar{n}\}$ *and* $\lambda_{\bar{n}} = -\sum_{n \neq \bar{n}} e_n \lambda_n$*; if additionally* $\lambda_n < 0$ *for all* $n \in \{1, \ldots, d\}/\{\bar{n}\}$*, then* $\sigma_n > 0$ *for all* $n \in \{1, \ldots, d\}/\{\bar{n}\}$.

- *for any vector* $\sigma \in \mathbb{R}^d$*, solution of* $R\sigma = \lambda \in \mathbb{R}^d$*, the function* $V_0(\rho) = \sum_{n=1}^d \sigma_n \langle n| \rho |n\rangle$ *satisfies*

$$\left.\frac{d^2 V_0\big(\mathbb{K}^u(|n\rangle\langle n|)\big)}{du^2}\right|_{u=0} = \lambda_n \qquad \forall n \in \{1, \ldots, d\}.$$

Proof. Since the graph of R coincides with the graph of the right stochastic matrix P defined in Lemma 2.1, P is irreducible. Since it is a right stochastic matrix, its spectral radius is equal to 1. By Perron-Frobenius theorem for non-negative irreducible matrices, this spectral radius, i.e. 1, is also an eigenvalue of P and of P^T, with multiplicity one and associated to eigen-vectors having strictly positive entries: the right eigen-vector ($Pw = w$) is obviously $w = (1, \ldots, 1)^T$; the left eigen-vector $e = (e_1, \ldots, e_n)^T$ ($P^T e = e$) can be chosen such that $e_{\bar{n}} = 1$. Consequently, the rank of R is $d-1$ with $\ker(R) = \mathrm{span}(w)$ and $\mathrm{Im}(R) = e^\perp$ where $e^\perp$ is the hyper-plane orthogonal to e. Since $e^T\lambda = 0$, $\lambda \in \mathrm{Im}(R)$, exists σ such that $R\sigma = \lambda$. Since $\ker(R) = \mathrm{span}(w)$, there is a unique σ solution of $R\sigma = \lambda$ such that $\sigma_{\bar{n}} = 0$. The fact that $\sigma_n > \sigma_{\bar{n}}$ when $\lambda_n > 0$ for $n \neq \bar{n}$, comes from elementary manipulations of $P\sigma = \sigma - \lambda/\mathrm{Tr}\,(R)$ showing that $\min_{n \neq \bar{n}} \sigma_n > \sigma_{\bar{n}}$.

For any n, set $g_n^u = V_0(\mathbb{K}^u(|n\rangle\langle n|)) = \sum_l \sigma_l \langle l| \mathbb{K}^u(|n\rangle\langle n|) |l\rangle$. Set $P_l^u := \langle l| \mathbb{K}^u(|n\rangle\langle n|) |l\rangle$, we have

$$\frac{dP_l^u}{du} = \sum_\mu \left(\langle l| \frac{dM_\mu^u}{du} |n\rangle \langle n| M_\mu^{u\dagger} |l\rangle + \langle l| M_\mu^u |n\rangle \langle n| \frac{dM_\mu^{u\dagger}}{du} |l\rangle \right)$$

and

$$\begin{aligned}
\frac{d^2 P_l^u}{du^2}\Big|_{u=0} = &\sum_\mu \Big(\langle l| \frac{d^2 M_\mu^u}{du^2}\Big|_{u=0} |n\rangle \langle n| M_\mu^{0\dagger} |l\rangle \\
&\qquad + \langle l| \frac{dM_\mu^u}{du}\Big|_{u=0} |n\rangle \langle n| \frac{dM_\mu^{u\dagger}}{du}\Big|_{u=0} |l\rangle + \langle l| M_\mu^0 |n\rangle \langle n| \frac{d^2 M_\mu^{u\dagger}}{du^2}\Big|_{u=0} |l\rangle \Big) \\
= &\sum_\mu \left(2 \left| \langle n| \frac{dM_\mu^{u\dagger}}{du}\Big|_{u=0} |l\rangle \right|^2 + 2\delta_{nl} \Re\Big(c_{\mu,n} \langle n| \frac{d^2 M_\mu^{u\dagger}}{du^2}\Big|_{u=0} |l\rangle \Big) \right).
\end{aligned}$$

Therefore $\frac{d^2 P_l^u}{du^2}|_{u=0} = R_{n,l}$ and $\left.\frac{d^2 V_0\left(\mathbb{K}^u(|n\rangle\langle n|)\right)}{du^2}\right|_{u=0} = \sum_{l=1}^d R_{n,l}\sigma_l = \lambda_n$. $\square$

2.3.2 The global stabilizing feedback

Theorem 2.2. *Consider the Markov chain* (7) *with assumptions 1, 2 and 3. Take* $\bar{n} \in \{1,\ldots,d\}$ *and assume that the graph of the Metzler matrix* R *of lemma 2.1 is strongly connected. Take* $\epsilon > 0$, $\sigma \in \mathbb{R}_+^d$ *the solution of* $R\sigma = \lambda$ *with* $\sigma_{\bar{n}} = 0$, $\lambda_n < 0$ *for* $n \in \{1,\ldots,d\}/\{\bar{n}\}$, $\lambda_{\bar{n}} = -\sum_{n\neq\bar{n}} e_n \lambda_n$ *(see lemma 2.2) and consider*

$$V_\epsilon(\rho) = \sum_{n=1}^{d} \sigma_n \langle n|\,\rho\,|n\rangle - \tfrac{\epsilon}{2}(\langle n|\,\rho\,|n\rangle)^2.$$

Take $\bar{u} > 0$ *and consider the following feedback law*

$$u_k = \underset{\xi\in[-\bar{u},\bar{u}]}{argmin}\big(\mathbb{E}\left(W_\epsilon(\chi_{k+1})|\chi_k, u_k = \xi\right)\big) =: f(\chi_k) \tag{8}$$

where $W_\epsilon(\chi) = V_\epsilon(\mathbb{K}^{\beta_1}(\mathbb{K}^{\beta_2}(\ldots\ldots\mathbb{K}^{\beta_\tau}(\rho)\ldots)))$.

Then exists $u^* > 0$ *such that, for all* $\bar{u} \in]0, u^*]$ *and* $\epsilon \in \left]0, \min_{n\neq\bar{n}}\left(\frac{\lambda_n}{R_{n,n}}\right)\right]$, *the closed loop Markov chain of state* χ_k *with the feedback law* (8) *converges almost surely towards* $(|\bar{n}\rangle\langle\bar{n}|, 0, \cdots, 0)$ *for any initial condition* $\chi_0 \in \mathcal{D}\times[-\bar{u},\bar{u}]^\tau$.

Proof. For the sake of simplicity, first we demonstrate this theorem for $\tau = 1$ and thus for $\chi = (\rho, \beta_1)$. We then explain how this proof may be extended to arbitrary $\tau > 1$.

We have

$$\mathbb{E}\left(W_\epsilon(\chi_{k+1})|\chi_k, u_k\right) = \sum_\mu p_{\mu,\rho_k}^{\beta_{1,k}} V_\epsilon(\mathbb{K}^{u_k}(\mathbb{M}_\mu^{\beta_{1,k}}(\rho_k))).$$

Thus $\mathbb{E}\left(W_\epsilon(\chi_{k+1})|\chi_k, u_k\right) = -Q_1(\chi_k) + \sum_\mu p_{\mu,\rho_k}^{\beta_{1,k}} V_\epsilon(\mathbb{K}^0(\mathbb{M}_\mu^{\beta_{1,k}}(\rho_k)))$ where we have set

$$Q_1(\chi_k) = \sum_\mu p_{\mu,\rho_k}^{\beta_{1,k}} V_\epsilon(\mathbb{K}^0(\mathbb{M}_\mu^{\beta_{1,k}}(\rho_k))) - \min_{\xi\in[-\bar{u},\bar{u}]} \sum_\mu p_{\mu,\rho_k}^{\beta_{1,k}} V_\epsilon(\mathbb{K}^\xi(\mathbb{M}_\mu^{\beta_{1,k}}(\rho_k))) \tag{9}$$

and we clearly have $Q_1 \geq 0$.

Using $V_\epsilon(\mathbb{K}^0(\rho)) = V_\epsilon(\rho)$ for any $\rho \in \mathcal{D}$ and $\sum_\mu p_{\mu,\rho_k}^{\beta_{1,k}} V_\epsilon(\mathbb{K}^0(\mathbb{M}_\mu^{\beta_{1,k}}(\rho_k))) = V_\epsilon(\mathbb{K}^{\beta_{1,k}}(\rho_k)) - Q_2(\chi_k)$ with

$$\begin{aligned} Q_2(\chi) = \tfrac{1}{4}\sum_{n=1}^{d}\sum_{\mu,\nu} \mathrm{Tr}\left(M_\mu^{\beta_1}\rho M_\mu^{\beta_1\dagger}\right)\mathrm{Tr}\left(M_\nu^{\beta_1}\rho M_\nu^{\beta_1\dagger}\right) & \\ \left(\frac{\langle n|\, M_\mu^{\beta_1}\rho M_\mu^{\beta_1\dagger}\,|n\rangle}{\mathrm{Tr}\left(M_\mu^{\beta_1}\rho M_\mu^{\beta_1\dagger}\right)} - \frac{\langle n|\, M_\nu^{\beta_1}\rho M_\nu^{\beta_1\dagger}\,|n\rangle}{\mathrm{Tr}\left(M_\nu^{\beta_1}\rho M_\nu^{\beta_1\dagger}\right)}\right)^2 &, \end{aligned} \tag{10}$$

we have

$$\mathbb{E}\left(W_\epsilon(\chi_{k+1})|\chi_k, u_k\right) = W_\epsilon(\chi_k) - Q_1(\chi_k) - Q_2(\chi_k) \tag{11}$$

where the continuous and non-negative functions Q_1 and Q_2 are defined by (9) and (10). $W_\epsilon(\chi_k)$ is thus a supermartingale. According to Theorem A.1, the ω-limit set I_∞, of χ_k satisfies

$$I_\infty \subset \{(\rho, \beta_1) \in \mathcal{D} \times [-\bar{u}, \bar{u}] \mid Q_1(\rho, \beta_1) = 0,\ Q_2(\rho, \beta_1) = 0\}.$$

We now show in three steps that I_∞ only consists of the target Fock state.

Step 1. For all $\delta > 0$, there exists $\bar{u} > 0$ small enough such that

$$I_\infty \subset \bigcup_{n=1}^{d} \Big\{(\rho, \beta_1) \in \mathcal{D} \times [-\bar{u}, \bar{u}] \mid \langle n|\rho|n\rangle \geq 1 - \delta\Big\}.$$

Proof of step 1. Step 1 follows from $Q_2(\rho) = 0$ for all $(\rho, \beta_1) \in I_\infty$ and Lemma 2.3:

Lemma 2.3. *Consider the function Q_2 defined by* (10) *and $\widetilde{u} > 0$. Then there exists $C > 0$ such that for all $(\rho, \beta_1) \in \mathcal{D} \times [-\widetilde{u}, \widetilde{u}]$ satisfying $Q_2(\rho, \beta_1) = 0$, there exists $n \in \{1, \ldots, d\}$ such that $\rho_{n,n} = \langle n|\, \rho\, |n\rangle \geq 1 - C|\beta_1|$.*

A proof of this technical lemma is given in the appendix.

Step 2. There exist $\delta' > 0$ and $\bar{u} > 0$, small enough, such that

$$I_\infty \subset \{(\rho, \beta_1) \in \mathcal{D} \times [-\bar{u}, \bar{u}] \mid \langle \bar{n}|\rho|\bar{n}\rangle \geq 1 - \delta'\}.$$

Proof of step 2. If $Q_1(\rho, \beta_1) = 0$, the minimum of the function

$$[-\bar{u}, \bar{u}] \ni \xi \mapsto F_{\rho,\beta_1}(\xi) = \sum_\mu p_{\mu,\rho}^{\beta_1} V_\epsilon(\mathbb{K}^\xi(\mathbb{M}_\mu^{\beta_1}(\rho)))$$

is attained at $\xi = 0$.

By construction of V_ϵ, we know that, for $\beta_1 = 0$, $\rho = |n\rangle\langle n|$,

$$\left.\frac{d^2 F_{|n\rangle\langle n|,0}(\xi)}{d\xi^2}\right|_{\xi=0} < 0$$

if $n \neq \bar{n}$, and $\epsilon \leq \min_{n\neq\bar{n}} \left(\frac{\lambda_n}{R_{n,n}}\right)$. The dependence of $d^2 F_{\rho,\beta_1}/d\xi^2$ versus ρ and β_1 is continuous from Assumption 3. Therefore, there exist $\delta', \bar{u} > 0$ such that for all

$$(\rho, \beta_1) \in \bigcup_{n\neq\bar{n}} \{(\rho, \beta_1) \in \mathcal{D} \times [-\bar{u}, \bar{u}] \mid \langle n|\rho|n\rangle \geq 1 - \delta'\} \tag{12}$$

we have

$$\left.\frac{d^2 F_{\rho,\beta_1}(\xi)}{d\xi^2}\right|_{\xi=0} < 0.$$

Therefore, for all (ρ, β_1) satisfying (12), $\xi = 0$, can not minimize $F_{\rho,\beta_1}(\xi)$ and we have

$$I_\infty \cap \bigcup_{n \neq \bar{n}} \{(\rho, \beta_1) \in \mathcal{D} \times [-\bar{u}, \bar{u}] \mid \langle n|\rho|n\rangle \geq 1 - \delta'\} = \emptyset.$$

Therefore we get,

$$I_\infty \subset \{(\rho, \beta_1) \in \mathcal{D} \times [-\bar{u}, \bar{u}] \mid \langle \bar{n}|\rho|\bar{n}\rangle \geq 1 - \delta'\},$$

by setting $\delta = \delta'$ in Step 1, for $\bar{u}$ small enough. This finishes the proof of Step 2.

Step 3. $\bar{u}$ can be chosen small enough so that $I_\infty = \{(|\bar{n}\rangle \langle \bar{n}|, 0)\}$.

Proof of step 3. By construction of V_ϵ, we have for $\rho = |\bar{n}\rangle \langle \bar{n}|$ and $\beta_1 = 0$,

$$\left.\frac{d^2 F_{|\bar{n}\rangle\langle\bar{n}|,0}(\xi)}{d\xi^2}\right|_{\xi=0} > 0.$$

By continuity of $d^2 F_{\rho,\beta_1}/d\xi^2$ with respect to ρ and β_1, we can choose $\bar{\delta}$ and $\bar{u}$ small enough such that for all $\beta_1 \in [-\bar{u}, \bar{u}]$ and ρ satisfying $\langle \bar{n}|\rho|\bar{n}\rangle \geq 1 - \bar{\delta}$ we have

$$\left.\frac{d^2 F_{\rho,\beta_1}(\xi)}{d\xi^2}\right|_{\xi=0} > 0.$$

This implies that on the domain

$$\{(\rho, \beta_1, \xi) \in \mathcal{D} \times [-\bar{u}, \bar{u}]^2 \mid \langle n|\rho|n\rangle \geq 1 - \bar{\delta}\},$$

F is a uniformly strongly convex function of $\xi \in [-\bar{u}, \bar{u}]$. Thus the argument of its minimum over $\xi \in [-\bar{u}, \bar{u}]$ is a continuous function of ρ and β_1.

Now we choose $\delta'' = \min\{\bar{\delta}/2, \delta'/2\}$, where δ' is as in step 2. Then, taking a convergent subsequence of $\{\chi_k\}_{k=1}^\infty$ (that we still denote by χ_k for simplicity sakes), we have

$$\chi_k \longrightarrow (\rho_\infty, \beta_{1,\infty}) \in I_\infty \subset \{(\rho, \beta_1) \in \mathcal{D} \times [-\bar{u}, \bar{u}] \mid \langle n|\rho|n\rangle \geq 1 - \bar{\delta}\}.$$

Therefore,

$$u_k = \underset{\xi \in [-\bar{u}, \bar{u}]}{\operatorname{argmin}} F_{\rho_k,\beta_{1,k}}(\xi) \rightarrow \underset{\xi \in [-\bar{u}, \bar{u}]}{\operatorname{argmin}} F_{\rho_\infty,\beta_{1,\infty}}(\xi) = 0.$$

In the above, we get the last equality from the fact that $Q_1(\rho_\infty, \beta_{1,\infty}) = 0$.

Since $\beta_{1,k} = u_{k-1}$, $\beta_{1,k}$ tends almost surely towards 0. We know that $Q_2(\rho_k, \beta_{1,k})$ and $Q_1(\rho_k, \beta_{1,k})$ tend also almost surely to 0 (theorem A.1) and by uniform (in ρ) continuity with respect to $\beta_{1,k}$, $Q_2(\rho_k, 0)$ and $Q_1(\rho_k, 0)$ tend almost surely to 0. Since $Q_1(\rho, 0) = Q_2(\rho, 0) = 0$ implies $\rho = |\bar{n}\rangle \langle \bar{n}|$, ρ_k converges almost surely towards $|\bar{n}\rangle \langle \bar{n}|$. This completes the proof for $\tau = 1$.

Extension to $\tau > 1$. For $\tau > 1$ and $\chi = (\rho, \beta_1, \dots, \beta_\tau)$, the proof is very similar. We still have (11) with Q_1 and Q_2 given by formulae analogous to (9) and (10): $\beta_{1,k}$ is replaced by $\beta_{\tau,k}$; $\mathbb{M}_\mu^{\beta_{1,k}}(\rho_k)$ is replaced by $\mathbb{K}^{\beta_{1,k}} \dots \mathbb{K}^{\beta_{\tau-1,k}}(\mathbb{M}_\mu^{\beta_{\tau,k}}(\rho_k))$; $p_{\mu,\rho_k}^{\beta_{\tau,k}} = \mathrm{Tr}\left(M_\mu^{\beta_{\tau,k}} \rho_k {M_\mu^{\beta_{\tau,k}}}^\dagger\right)$ is replaced by $\mathrm{Tr}\left(\mathbb{K}^{\beta_{1,k}} \dots \mathbb{K}^{\beta_{\tau-1,k}}(M_\mu^{\beta_{\tau,k}} \rho_k {M_\mu^{\beta_{\tau,k}}}^\dagger)\right)$ (Kraus maps are trace preserving). The analogue of technical Lemma 2.3, whose proof relies on similar continuity and compactness arguments, has now the following statement:

Lemma 2.4. *There exists $C > 0$ such that for all $(\rho, \beta_1, \dots, \beta_\tau) \in \mathcal{D} \times [-\widetilde{u}, \widetilde{u}]^\tau$ satisfying $Q_2(\rho, \beta_1, \dots, \beta_\tau) = 0$, there exists $n \in \{1, \dots, d\}$ such that $\rho_{n,n} \geq 1 - C(|\beta_1| + |\beta_2| + \dots + |\beta_\tau|)$.*

The last part of the proof showing that, for $\bar{u}$ small enough, the control u_k is a continuous function of χ_k when χ_k is in the neighborhood of the ω-limit set

$$\{\chi \in \mathcal{D} \times [-\bar{u}, \bar{u}]^\tau \mid Q_1(\chi) = Q_2(\chi) = 0\}$$

remains almost the same. □

2.3.3 Quantum filter and separation principle

When the measurement process is fully efficient and admits no error, the Markov process (2) represents a natural choice for estimating the hidden state ρ. Indeed, the estimate ρ^{est} of ρ satisfies the following dynamics

$$\rho_{k+1}^{\text{est}} = \mathbb{M}_{\mu_k}^{u_{k-\tau}}(\rho_k^{\text{est}}) \tag{13}$$

where the measurement outcome μ_k is driven by (2). In practice, the control u_k defined in Theorem 2.2 could only depend on this estimation ρ_k^{est} replacing ρ_k in χ_k. If $\rho_0^{\text{est}} = \rho_0$, then $\rho_k^{\text{est}} \equiv \rho_k$ and Theorem 2.2 ensures convergence towards the target state. Otherwise, the following result guaranties the convergence of such observer/controller scheme when $\ker(\rho_0^{\text{est}}) \subset \ker(\rho_0)$.

Theorem 2.3. *Consider the Markov chain of state ρ_k obeying* (2) *and assume that the assumptions of Theorem 2.2 are satisfied. For each measurement outcome μ_k given by* (2)*, consider the estimation ρ_k^{est} given by* (13) *with an initial condition ρ_0^{est}. Set $u_k = f(\rho_k^{est}, u_{k-1}, \dots, u_{k-\tau})$ where f is given by* (8)*. Then there exists $u^* > 0$ such that, for all $\bar{u} \in]0, u^*]$ and $\epsilon \in \left]0, \min_{n \neq \bar{n}} \left(\frac{\lambda_n}{R_{n,n}}\right)\right]$, ρ_k and ρ_k^{est} converge almost surely towards the target state $|\bar{n}\rangle\langle\bar{n}|$ as soon as $\ker(\rho_0^{est}) \subset \ker(\rho_0)$.*

Proof. Set $\bar{\rho} = |\bar{n}\rangle\langle\bar{n}|$. The main idea is that $\mathbb{E}\left(\mathrm{Tr}\left(\rho_k \bar{\rho}\right) | \rho_0, \rho_0^{\text{est}}\right)$ (where we take the expectation over all jump realizations) depends linearly on ρ_0 even though we apply the feedback control.

Since $u_{k-\tau}$ is a function of $(\rho_0^{\text{est}}, \mu_0, \cdots, \mu_{k-\tau-1})$, we have

$$\mathbb{E}\left(\mathrm{Tr}\left(\rho_k \bar{\rho}\right) | \rho_0, \rho_0^{\text{est}}\right) = \sum_{\mu_0, \cdots, \mu_{k-1}} \mathrm{Tr}\left(\widetilde{M}_{\mu_{k-1}}^{u_{k-\tau}}\left(\cdots\left(\widetilde{M}_{\mu_0}^{u_{-\tau}}(\rho_0)\right)\right)\bar{\rho}\right),$$

where $\widetilde{M_\mu^u}(\rho) = M_\mu^u \rho M_\mu^{u\dagger}$. The linearity of $\mathbb{E}\left(\operatorname{Tr}\left(\rho_k\bar{\rho}\right)|\rho_0, \rho_0^{\text{est}}\right)$ with respect to ρ_0 is thus verified. Now we apply the assumption $\ker(\rho_0^{\text{est}}) \subset \ker(\rho_0)$ and therefore one can find a constant $\gamma \in]0,1[$ and a well-defined density matrix ρ_0^c in $\mathcal{D}$, such that

$$\rho_0^{\text{est}} = \gamma\rho_0 + (1-\gamma)\rho_0^c.$$

By the assumptions of the theorem and applying the dominated convergence theorem:

$$\lim_{k\to\infty} \mathbb{E}\left(\operatorname{Tr}\left(\rho_k\bar{\rho}\right) \mid \rho_0^{\text{est}}, \rho_0^{\text{est}}\right) = 1.$$

By the linearity of $\mathbb{E}\left(\operatorname{Tr}\left(\rho_k\bar{\rho}\right) \mid \rho_0, \rho_0^{\text{est}}\right)$ with respect to ρ_0, we have

$$\mathbb{E}\left(\operatorname{Tr}\left(\rho_k\bar{\rho}\right) \mid \rho_0^{\text{est}}, \rho_0^{\text{est}}\right) = \gamma\mathbb{E}\left(\operatorname{Tr}\left(\rho_k\bar{\rho}\right) \mid \rho_0, \rho_0^{\text{est}}\right) + (1-\gamma)\mathbb{E}\left(\operatorname{Tr}\left(\rho_k\bar{\rho}\right) \mid \rho_0^c, \rho_0^{\text{est}}\right),$$

and as both $\mathbb{E}\left(\operatorname{Tr}\left(\rho_k\bar{\rho}\right) \mid \rho_0, \rho_0^{\text{est}}\right)$ and $\mathbb{E}\left(\operatorname{Tr}\left(\rho_k\bar{\rho}\right) \mid \rho_0^c, \rho_0^{\text{est}}\right)$ are less than or equal to one, we necessarily have that both of them converge to 1 since $0 < \gamma < 1$:

$$\lim_{k\to\infty} \mathbb{E}\left(\operatorname{Tr}\left(\rho_k\bar{\rho}\right) \mid \rho_0, \rho_0^{\text{est}}\right) = 1.$$

This implies the almost sure convergence of ρ_k towards the pure state $\bar{\rho}$.

We have also $\mathbb{E}\left(\operatorname{Tr}\left(\rho_k^{\text{est}}\bar{\rho}\right)|\rho_0, \rho_0^{\text{est}}\right)$ depending linearly on ρ_0. Thus

$$\mathbb{E}\left(\operatorname{Tr}\left(\rho_k^{\text{est}}\bar{\rho}\right) \mid \rho_0^{\text{est}}, \rho_0^{\text{est}}\right) = \gamma\mathbb{E}\left(\operatorname{Tr}\left(\rho_k^{\text{est}}\bar{\rho}\right) \mid \rho_0, \rho_0^{\text{est}}\right) + (1-\gamma)\mathbb{E}\left(\operatorname{Tr}\left(\rho_k^{\text{est}}\bar{\rho}\right) \mid \rho_0^c, \rho_0^{\text{est}}\right),$$

Using the fact that when $\rho_0 = \rho_0^{\text{est}}$, $\rho_k = \rho_k^{\text{est}}$ for all k, we conclude similarly that ρ_k^{est} converges almost surely towards $\bar{\rho}$ even if ρ_0 and ρ_0^{est} do not coincide. $\square$

3 Imperfect Measurements

We now consider the feedback control problem in the presence of classical measurement imperfections with the possibility of detection errors. The imperfections in the measurement process are described by a classical probabilistic model relying on a left stochastic matrix $(\eta_{\mu',\mu})$, $\mu' \in \{1,\ldots,m'\}$ and $\mu \in \{1,\ldots,m\}$: $\eta_{\mu',\mu} \geq 0$ and for any μ, $\sum_{\mu'=1}^{m'} \eta_{\mu',\mu} = 1$. The integer m' corresponds to the number of imperfect outcomes and $\eta_{\mu',\mu}$ is the probability of having the imperfect outcome μ' knowing that the perfect one is μ.

Set

$$\widehat{\rho}_k = \mathbb{E}\left(\rho_k|\rho_0, \mu'_0, \ldots, \mu'_{k-1}, u_{-\tau}, \ldots, u_{k-\tau-1}\right). \tag{14}$$

Since ρ_k follows (2), $\widehat{\rho}_k$ is also governed by a Markov process [17]:

$$\widehat{\rho}_{k+1} = \mathbb{L}_{\mu'_k}^{u_{k-\tau}}(\widehat{\rho}_k), \tag{15}$$

where

- for each μ', $\mathbb{L}^u_{\mu'}$ is the super-operator defined by

$$\widehat{\rho} \mapsto \mathbb{L}^u_{\mu'}(\widehat{\rho}) = \frac{\mathbf{L}^u_{\mu'}(\widehat{\rho})}{\mathrm{Tr}\left(\mathbf{L}^u_{\mu'}(\widehat{\rho})\right)}$$

  with $\mathbf{L}^u_{\mu'}(\widehat{\rho}) = \sum_{\mu=1}^m \eta_{\mu',\mu} M^u_\mu \widehat{\rho} M^{u\dagger}_\mu$,

- μ'_k is a random variable taking values μ' in $\{1, \cdots, m'\}$ with probability

$$p^{u_{k-\tau}}_{\mu',\widehat{\rho}_k} = \mathrm{Tr}\left(\mathbf{L}^{u_{k-\tau}}_{\mu'}(\widehat{\rho}_k)\right).$$

Since $\eta_{\mu',\mu}$ is a left stochastic matrix, we have,

$$\mathbb{E}\left(\widehat{\rho}_{k+1} | \widehat{\rho}_k = \rho, u_{k-\tau} = u\right) = \sum_{\mu'=1}^{m'} \mathbf{L}^u_{\mu'}(\widehat{\rho}) = \sum_{\mu=1}^{m} M^u_\mu \widehat{\rho} M^{u\dagger}_\mu = \mathbb{K}^u(\widehat{\rho}),$$

which is precisely the Kraus map (1) associated with the Markov process ρ_k. By assumption 1, each pure state $|n\rangle\langle n|$, $n \in \{1, \ldots, d\}$ remains a fixed point of the Markov process (15) when $u \equiv 0$.

We now consider the dynamics of the filter state $\widehat{\rho}$ in the presence of delays in the feedback control. Similar to the case with perfect measurements, let $\widehat{\chi}_k = (\widehat{\rho}_k, \beta_{1,k}, \ldots, \beta_{\tau,k})$ be the filter state at step k, where $\beta_{l,k} = u_{k-l}$ is the feedback control at time step k delayed l steps. Then the delay dynamics are determined by the following Markov chain

$$\begin{cases} \widehat{\rho}_{k+1} &= \mathbb{L}^{\beta_{\tau,k}}_{\mu'_k}(\widehat{\rho}_k) \\ \beta_{1,k+1} &= u_k \\ \beta_{2,k+1} &= \beta_{1,k} \\ & \vdots \\ \beta_{\tau,k+1} &= \beta_{\tau-1,k}. \end{cases} \tag{16}$$

Instead of Assumption 2 we now assume

Assumption 4. *For all $n_1 \neq n_2$ in $\{1, \cdots, d\}$, there exists $\mu' \in \{1, \cdots, m'\}$ such that*

$$\sum_{\mu=1}^m \eta_{\mu',\mu} |c_{\mu,n_1}|^2 \neq \sum_{\mu=1}^m \eta_{\mu',\mu} |c_{\mu,n_2}|^2.$$

Assumption 4 means that there exists a μ' such that the statistics when $u \equiv 0$ for obtaining the measurement result μ' are different for the fixed points $|n_1\rangle\langle n_1|$ and $|n_2\rangle\langle n_2|$. This follows by noting that $\mathrm{Tr}\left(\mathbf{L}^0_{\mu'}(|n\rangle\langle n|)\right) = \sum_{\mu=1}^m \eta_{\mu',\mu} |c_{\mu,n}|^2$ for $n \in \{1, \cdots, d\}$.

We now state the main result of this Section, which is the analogue of Theorem 2.2 in the case of imperfect measurements.

Theorem 3.1. *Consider the Markov chain* (16) *with assumptions 1, 3 and 4. Take* $\bar{n} \in \{1, \dots, d\}$. *Assume that the graph of Meztler matrix* R *of Lemma 2.1 is strongly connected. Take* $\epsilon > 0$, $\sigma \in \mathbb{R}_+^d$ *solution of* $R\sigma = \lambda$ *with* $\sigma_{\bar{n}} = 0$, , $\lambda_n < 0$ *for* $n \in \{1, \dots, d\}/\{\bar{n}\}$, $\lambda_{\bar{n}} = -\sum_{n \neq \bar{n}} e_n \lambda_n$ *(see Lemma 2.2) and set*

$$V_\epsilon(\widehat{\rho}) = \sum_{n=1}^{d} \sigma_n \langle n| \widehat{\rho} |n\rangle - \tfrac{\epsilon}{2}(\langle n| \widehat{\rho} |n\rangle)^2.$$

Take $\bar{u} > 0$ *and consider the following feedback law*

$$u_k = \underset{\xi \in [-\bar{u}, \bar{u}]}{argmin} \Big(\mathbb{E}\left(W_\epsilon(\widehat{\chi}_{k+1}) | \widehat{\chi}_k, u_k = \xi \right) \Big) = f(\widehat{\chi}_k) \tag{17}$$

where $W_\epsilon(\widehat{\chi}) = V_\epsilon(\mathbb{K}^{\beta_1}(\mathbb{K}^{\beta_2}(\dots\dots\mathbb{K}^{\beta_\tau}(\widehat{\rho})\dots)))$.

Then there exists $u^* > 0$ *such that, for all* $\bar{u} \in]0, u^*]$ *and* $\epsilon \in \left]0, \min_{n \neq \bar{n}} \left(\frac{\lambda_n}{R_{n,n}}\right)\right]$, *the closed loop Markov chain of state* $\widehat{\chi}_k$ *with the feedback law* (17) *converges almost surely towards* $(|\bar{n}\rangle\langle\bar{n}|, 0, \cdots, 0)$ *for any initial condition* $\widehat{\chi}_0 \in \mathcal{D} \times [-\bar{u}, \bar{u}]^\tau$.

The proof of this theorem is almost identical to that of Theorem 2.2 with $\mathbb{M}_\mu^u$ replaced by $\mathbb{L}_{\mu'}^u$ and $p_{\mu,\rho}^u$ replaced by $p_{\mu',\widehat{\rho}}^u$ and we do not give the details of this proof.

For estimating the hidden state $\widehat{\rho}$ necessary to apply the feedback (17), let us consider the estimate $\widehat{\rho}^{\text{est}}$ given by

$$\widehat{\rho}_{k+1}^{\text{est}} = \mathbb{L}_{\mu'_k}^{u_{k-\tau}}(\widehat{\rho}_k^{\text{est}}) \tag{18}$$

where μ'_k corresponds to the imperfect outcome detected at step k. Such μ'_k is correlated to the perfect and hidden outcome μ_k of (2) through the classical stochastic process attached to $(\eta_{\mu',\mu})$: for each μ_k, μ'_k is a random variable to be equal to $\mu' \in \{1, \dots, m'\}$ with probability η_{μ',μ_k}.

In practice, the control u_k defined in Theorem 3.1 could only depend on this estimation $\widehat{\rho}_k^{\text{est}}$ replacing $\widehat{\rho}_k$ in $\widehat{\chi}_k = (\widehat{\rho}_k, u_{k-1}, \dots, u_{k-\tau})$. The following result guaranties the convergence of the feedback scheme when $\ker(\widehat{\rho}_0^{\text{est}}) \subset \ker(\rho_0)$.

Theorem 3.2. *Consider the Markov chain of state* ρ_k *obeying* (2) *and take assumptions of Theorem 3.1. Consider the estimation* $\widehat{\rho}_k^{est}$ *given by* (18) *with an initial condition* $\widehat{\rho}_0^{est}$. *Set* $u_k = f(\widehat{\rho}_k^{est}, u_{k-1}, \dots, u_{k-\tau})$ *where* f *is given by* (17).

Then there exists $u^* > 0$ *such that, for all* $\bar{u} \in]0, u^*]$ *and* $\epsilon \in \left]0, \min_{n \neq \bar{n}} \left(\frac{\lambda_n}{R_{n,n}}\right)\right]$, ρ_k *and* $\widehat{\rho}_k^{est}$ *converge almost surely towards the target state* $|\bar{n}\rangle\langle\bar{n}|$ *as soon as* $\ker(\widehat{\rho}_0^{est}) \subset \ker(\rho_0)$.

Proof. Let us first prove that $\widehat{\rho}_k$ defined by (14) converges almost surely towards $|\bar{n}\rangle\langle\bar{n}|$. Since $\widehat{\rho}_0 = \rho_0$, we have $\ker(\widehat{\rho}_0^{\text{est}}) \subset \ker(\widehat{\rho}_0)$. Thus, there exist $\rho_c \in \mathcal{D}$ and $\gamma \in]0, 1[$, such that, $\widehat{\rho}_0^{\text{est}} = \gamma\widehat{\rho}_0 + (1-\gamma)\widehat{\rho}_0^c$. Similarly to the proof of Theorem 2.3, $\mathbb{E}\left(\text{Tr}\left(\widehat{\rho}_k\bar{\rho}\right) | \widehat{\rho}_0, \widehat{\rho}_0^{\text{est}}\right)$ depends linearly on $\widehat{\rho}_0$:

$$\mathbb{E}\left(\text{Tr}\left(\widehat{\rho}_k\bar{\rho}\right) \;|\; \widehat{\rho}_0^{\text{est}}, \widehat{\rho}_0^{\text{est}}\right) = \gamma\mathbb{E}\left(\text{Tr}\left(\widehat{\rho}_k\bar{\rho}\right) \;|\; \widehat{\rho}_0, \widehat{\rho}_0^{\text{est}}\right) + (1-\gamma)\mathbb{E}\left(\text{Tr}\left(\widehat{\rho}_k\bar{\rho}\right) \;|\; \widehat{\rho}_0^c, \widehat{\rho}_0^{\text{est}}\right),$$

Moreover by Theorem 3.1, $\mathbb{E}\left(\mathrm{Tr}\left(\widehat{\rho}_k\bar{\rho}\right) \mid \widehat{\rho}_0^{\mathrm{est}}, \widehat{\rho}_0^{\mathrm{est}}\right)$ converges almost surely towards 1, thus $\mathbb{E}\left(\mathrm{Tr}\left(\widehat{\rho}_k\bar{\rho}\right) \mid \widehat{\rho}_0, \widehat{\rho}_0^{\mathrm{est}}\right)$ and $\mathbb{E}\left(\mathrm{Tr}\left(\widehat{\rho}_k\bar{\rho}\right) \mid \widehat{\rho}_0^{\mathrm{c}}, \widehat{\rho}_0^{\mathrm{est}}\right)$ converge also towards 1. Consequently $\widehat{\rho}_k$ converges almost surely towards $|\bar{n}\rangle\langle\bar{n}|$.

Since $\widehat{\rho}_k$ is the conditional expectation of ρ_k knowing the past imperfect outcomes and control inputs and since its limit $|\bar{n}\rangle\langle\bar{n}|$ is a pure state, ρ_k converges necessarily towards the same pure state almost surely. Convergence of $\widehat{\rho}_k^{\mathrm{est}}$ relies on similar arguments exploiting the linearity of $\mathbb{E}\left(\mathrm{Tr}\left(\widehat{\rho}_k^{\mathrm{est}}\bar{\rho}\right) | \widehat{\rho}_0, \widehat{\rho}_0^{\mathrm{est}}\right)$ versus $\widehat{\rho}_0$. $\square$

4 The photon box

4.1 Experimental system

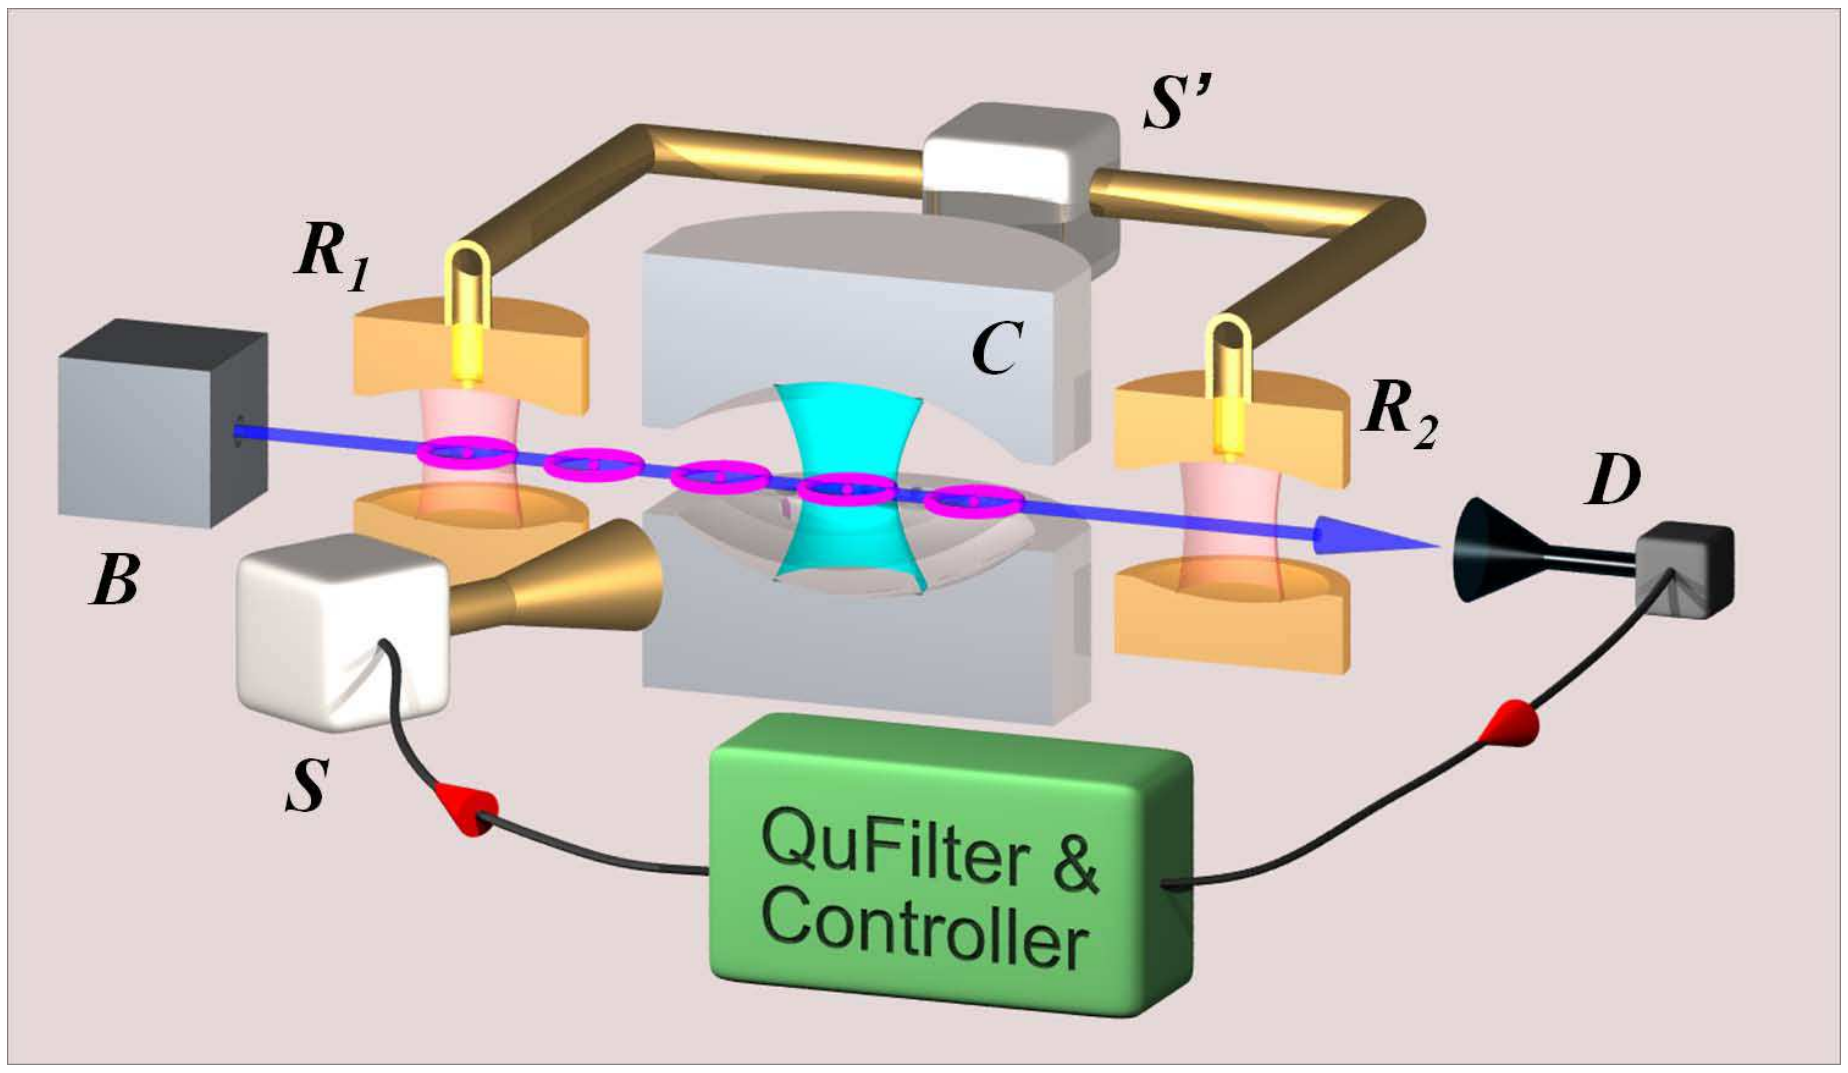

Figure 1: Scheme of the experimental setup.

The system to be controlled is a microwave electromagnetic field trapped in a cavity C (see figure 1), made of two high-reflection mirrors facing each other and able to store photons for almost $T_{\mathrm{cav}} \sim 0.1\,\mathrm{s}$. When prepared in a classical state, namely a coherent state $|\alpha\rangle$, where $\alpha \in \mathbb{C}$ denotes the amplitude of the field, the number of photons in the field is not well defined: the photon number probability distribution $P(n_{\mathrm{ph}})$ is a Poisson law of parameter $\langle n_{\mathrm{ph}}\rangle = |\alpha|^2$. Coherent states are robust states, that remain coherent while their energy $\langle n_{\mathrm{ph}}\rangle$ decays with a characteristic time T_{cav}. The non-classical photon number states $|n = n_{\mathrm{ph}} + 1\rangle \equiv |n_{\mathrm{ph}}\rangle$, or Fock states containing exactly $n_{\mathrm{ph}} \in \mathbb{N}$ photons, are more fragile: a so-called quantum jump towards $|n_{\mathrm{ph}} - 1\rangle$ occurs on average after time $T_{\mathrm{cav}}/n_{\mathrm{ph}}$ only. Real-time information is then required to correct for these jumps and stabilize these states.

In our experiment, this information is provided by individual two-level atoms, whose states are denoted $|g\rangle$ and $|e\rangle$, and which are prepared in box B and sent through the cavity mode every time interval T_p. In additional cavities R_1 and R_2, we can map these states to and from their quantum superposition which is sensitive to the field in C. While interacting with the cavity field, the atoms thus act as atomic clocks whose rate would be proportional to the number $n_{\rm ph}$ of photons stored in the cavity: they accumulate a phase $\phi(n_{\rm ph}) = \phi_0(n_{\rm ph} + 1/2)$, where ϕ_0 is the dephasing per photon. Measuring each atom in the $\{|g\rangle, |e\rangle\}$ basis by means of detector D gives partial information about $n_{\rm ph}$. Since the atomic preparation is not deterministic (Poisson process with a mean number of atoms per sample of $\langle n_a\rangle \approx 0.6$), zero, one or two atoms may be detected.

A real-time computer then runs the quantum filter, which estimates the actual density matrix ρ of the field using the outcome of the measurement and all available knowledge on the experimental setup. Notably, it takes into account the limited detection efficiency ε (percentage of atoms that are actually detected) and the detection errors η_e and η_g ($\eta_{s\in\{e,g\}}$ is the probability to detect an atom in the wrong state).

The controller eventually calculates through its feedback law the amplitude $u \in \mathbb{R}$ (scalar control input) of the classical microwave field that is injected into the cavity by the classical source S so as to bring the cavity field closer to the target state. The succession of the atomic detection, the state estimation and the microwave injection define one iteration of our feedback loop. For a more detailed description see [16, 15, 9].

4.2 The controlled Markov process and quantum filter

The three main processes that drive the evolution of our system are decoherence, injection and measurement. Their action onto the system's state can be described by three super-operators $\mathbb{T}$, $\mathbb{D}$ and $\mathbb{P}$, respectively, which we discuss in more details in the following [6]. All operators are expressed in the Fock-basis $(|n_{\rm ph}\rangle)_{n_{\rm ph}=0,\ldots,n_{\rm ph}^{\rm max}}$ truncated to $n_{\rm ph}^{\rm max}$ photons. With notations of sub-section 2.1, $d = n_{\rm ph}^{\rm max} + 1$ and the index $n = n_{\rm ph} + 1$.

Decoherence

The decoherence manifests through spontaneous loss or capture of a photon to or from the environment. Thus, it can be sufficiently described by the action of the superoperator $\mathbb{T}$ in the justified approximation $\theta = T_{\rm p}/T_{\rm cav} \ll 1$ in the form of

$$\rho \mapsto \mathbb{T}_\theta(\rho) = L_0\rho L_0^\dagger + L_-\rho L_-^\dagger + L_+\rho L_-^\dagger. \tag{19}$$

Here, the three operators L_0, L_- and L_+ refer to the situations where the photon number changes by 0, -1 and $+1$ after the time interval $T_{\rm p}$. They thus read

$$
\begin{aligned}
L_0 &= \mathbf{I} - \theta(1/2 + n_{\mathrm{th}})\,\mathbf{N} - (\theta n_{\mathrm{th}}/2)\,\mathbf{I}, && (20)\\
L_- &= \sqrt{\theta(1 + n_{\mathrm{th}})}\,\mathbf{a}, && (21)\\
L_+ &= \sqrt{\theta n_{\mathrm{th}}}\,\mathbf{a}^\dagger, && (22)
\end{aligned}
$$

where $\mathbf{a}$ and $\mathbf{a}^\dagger$ are photon annihilation and creation operators ($\mathbf{a}\,|n_{\mathrm{ph}}\rangle = \sqrt{n_{\mathrm{ph}}}\,|n_{\mathrm{ph}}-1\rangle$ and $\mathbf{a}^\dagger\,|n_{\mathrm{ph}}\rangle = \sqrt{n_{\mathrm{ph}}+1}\,|n_{\mathrm{ph}}+1\rangle$) and $\mathbf{N} = \mathbf{a}^\dagger\mathbf{a}$ is the photon number operator ($\mathbf{N}\,|n_{\mathrm{ph}}\rangle = n_{\mathrm{ph}}\,|n_{\mathrm{ph}}\rangle$). Besides, n_{th} is the mean number of photons in the cavity mode at thermal equilibrium with its environment.

Injection

The field control is realized by injecting into the cavity a small coherent microwave field of real amplitude $u \in \mathbb{R}$. It is described by the unitary displacement operator $D_u = \exp(u\mathbf{a}^\dagger - u\mathbf{a})$. The evolution of the state ρ after the control injection is thus modeled through

$$\rho \mapsto \mathbb{D}_u(\rho) = D_u \rho D_{-u}. \tag{23}$$

Since all analysis is performed up to the second order of the control parameter u, we use the following approximation of the displaced state:

$$\mathbb{D}_u(\rho) \approx \rho - u[\rho, \mathbf{a}^\dagger - \mathbf{a}] + \frac{u^2}{2}[[\rho, \mathbf{a}^\dagger - \mathbf{a}], \mathbf{a}^\dagger - \mathbf{a}]. \tag{24}$$

In the following we therefore limit the control to $u \in [-\bar{u}, \bar{u}]$ with $\bar{u} = 0.1 \ll 1$. Besides, this approximation allows to significantly reduce the computation time during the real-time state filtering.

Measurement

In the ideal case, every detection of an atomic sample gives one of the two possible results $\mu \in \{e, g\}$ and the system gets projected onto one of the two states given by

$$\mathbb{P}_\mu(\rho) = \frac{M_\mu \rho M_\mu^\dagger}{\mathrm{Tr}\left(M_\mu \rho M_\mu^\dagger\right)}. \tag{25}$$

The operators M_μ depend on the experimental settings such as the relative phase ϕ_r between cavities R_1 and R_2 and the dephasing per photon ϕ_0:

$$M_g = \cos\left(\frac{\phi_r + \phi_0(\mathbf{N} + 1/2)}{2}\right), \tag{26a}$$

$$M_e = \sin\left(\frac{\phi_r + \phi_0(\mathbf{N} + 1/2)}{2}\right). \tag{26b}$$

These measurement operators are diagonal in the photon number basis $\{|n_{\mathrm{ph}}\rangle\}$, illustrating their quantum non-demolition nature with respect to the photon

$\mu' \setminus \mu$	$\emptyset$	g	e	gg	ee	ge or eg
$\emptyset$	1	$1-\varepsilon$	$1-\varepsilon$	$(1-\varepsilon)^2$	$(1-\varepsilon)^2$	$(1-\varepsilon)^2$
g	0	$\varepsilon(1-\eta_g)$	$\varepsilon\eta_e$	$2\varepsilon(1-\varepsilon)(1-\eta_g)$	$2\varepsilon(1-\varepsilon)\eta_e$	$\varepsilon(1-\varepsilon)(1-\eta_g+\eta_e)$
e	0	$\varepsilon\eta_g$	$\varepsilon(1-\eta_e)$	$2\epsilon(1-\varepsilon)\eta_g$	$2\varepsilon(1-\varepsilon)(1-\eta_e)$	$\varepsilon(1-\varepsilon)(1-\eta_e+\eta_g)$
gg	0	0	0	$\varepsilon^2(1-\eta_g)^2$	$\varepsilon^2\eta_e^2$	$\varepsilon^2\eta_e(1-\eta_g)$
ge	0	0	0	$2\varepsilon^2\eta_g(1-\eta_g)$	$2\varepsilon^2\eta_e(1-\eta_e)$	$\varepsilon^2((1-\eta_g)(1-\eta_e)+\eta_g\eta_e)$
ee	0	0	0	$\varepsilon^2\eta_g^2$	$\varepsilon^2(1-\eta_e)^2$	$\varepsilon^2\eta_g(1-\eta_e)$

Table 1: Stochastic matrix $\eta_{\mu',\mu}$ showing the probability to measure outcome μ' for each ideal measurement outcome μ. Note that we cannot technically distinguish detection outcomes $\mu' = \{ge\}$ and $\mu' = \{eg\}$.

number operator and thus fulfilling Assumption 1. Besides, Assumption 2 can also be fulfilled by a proper choice of the experimental parameters ϕ_r and ϕ_0.

In the real experiment, the atom source is probabilistic and is characterized by a truncated Poisson probability distribution $P_a(n_a) \geq 0$ to have $n_a \in \{0, 1, 2\}$ atom(s) in a sample (we neglect events with more than 2 atoms). This expands the set of the possible detection outcomes to $m = 7$ values $\mu \in \{\emptyset, g, e, gg, eg, ge, ee\}$, related to the following measurement operators:

$$\begin{aligned}
L_\emptyset &= \sqrt{P_a(0)}\,\mathbf{I}, \qquad (27)\\
L_g &= \sqrt{P_a(1)}\,M_g,\\
L_e &= \sqrt{P_a(1)}\,M_e,\\
L_{gg} &= \sqrt{P_a(2)}\,M_g^2,\\
L_{ge} &= \sqrt{P_a(2)}\,M_g M_e,\\
L_{eg} &= \sqrt{P_a(2)}\,M_g M_e,\\
L_{ee} &= \sqrt{P_a(2)}\,M_g^2.
\end{aligned}$$

Finally, the real measurement process is not perfect: the detection efficiency is limited to $\varepsilon < 1$ and the state detection errors are non-zero ($0 < \eta_{e/g} < 1$). These imperfections are taken into account by considering the left-stochastic matrix $\eta_{\mu',\mu}$, given in Table 1 [17]. Consequently, the optimal state estimate after measurement outcome μ' gets the form

$$\mathbb{P}_{\mu'}(\rho) = \frac{\sum_{\mu=1}^{m} \eta_{\mu',\mu} L_\mu \rho L_\mu^\dagger}{\mathrm{Tr}\left(\sum_{\mu=1}^{m} \eta_{\mu',\mu} L_\mu \rho L_\mu^\dagger\right)}. \qquad (28)$$

State estimation

The last experimental complication to be taken into account is the spatial separation of the cavity C and the detector D, which results in τ atomic samples flying between them at every moment. This introduces a delay in the field control since a sample measured at step k has been in the cavity just after control injection made at step $k-\tau$. After taking into account our full knowledge about the experiment, we finally get the following state estimate at step $k+1$:

$$\widehat{\rho}_{k+1}^{\mathrm{est}} = \mathbb{P}_{\mu'_k}(\mathbb{D}_{u_{k-\tau}}(\mathbb{T}_\theta(\widehat{\rho}_k^{\mathrm{est}}))) \equiv \mathbb{L}_{\mu'_k}^{u_{k-\tau},\theta}(\widehat{\rho}_k^{\mathrm{est}}). \tag{29}$$

4.3 Feedback controller

For $\theta = 0$ (no cavity decoherence) the Markov model of density matrix $\widehat{\rho}$ associated to the filter (29) is exactly of the form (16) with $(|n_{\mathrm{ph}}\rangle\langle n_{\mathrm{ph}}|)_{n_{\mathrm{ph}}=0,\ldots,n_{\mathrm{ph}}^{\max}}$ being fixed-points in open-loop. Similarly, the underlying Markov process of state ρ, the true cavity state unobservable in practice because of detection imperfections and delays, admits the same fixed-points. With parameters given in sub-section 4.4 (except $\theta = 0$), these Markov processes satisfy assumptions 1-2-3 for ρ and assumptions 1-3-4 for $\widehat{\rho}$. Moreover the Metzler matrix R of Lemma 2.2 is irreducible since its graph coincides with the graph of $\mathbf{a}^\dagger - \mathbf{a}$, a tri-diagonal operator. Consequently the assumptions of theorem 3.1 are satisfied. The feedback law proposed in theorem 3.2 and relying on the filter state $\widehat{\rho}^{\mathrm{est}}$ will stabilize globally the unobservable state ρ towards the goal photon-number state $|\bar{n}_{\mathrm{ph}}\rangle\langle\bar{n}_{\mathrm{ph}}|$. Numerous closed-loop simulations show that taking $\epsilon = 0$ in the feedback law does not destroy stability and does not affect the convergence rates. This explains why in the simulations and experiments, we set $\epsilon = 0$ despite the fact that theorem 3.2 guaranties convergence only for arbitrary small but strictly positive ϵ.

For θ positive and small, the $|n_{\mathrm{ph}}\rangle\langle n_{\mathrm{ph}}|$'s are no more fixed-points for ρ and $\widehat{\rho}$ in open-loop. Nevertheless, closed-loop simulations and experimental data of figures 3 and 4 indicate that a slight adaptation of the feedback scheme of theorem 3.2 steers and maintains ρ and $\widehat{\rho}$ close to the target $|\bar{n}_{\mathrm{ph}}\rangle\langle\bar{n}_{\mathrm{ph}}|$ between photon-number jumps induced by cavity decoherence (jump operators L_+ and L_- given in (20)). The feedback of theorem 3.2 appears to be robust enough to compensate such cavity decoherence jumps induced by a finite lifetime of the photons.

Let us detail how to adapt the feedback scheme of theorem 3.2. At each step of an ideal experiment the control u_k minimizes the Lyapunov function $V_0(\tilde{\rho}_k) = \sum_{n_{\mathrm{ph}}} \sigma_{n_{\mathrm{ph}}} \langle n_{\mathrm{ph}}|\tilde{\rho}_k|n_{\mathrm{ph}}\rangle$ (ϵ is set to zero) calculated for state $\tilde{\rho}_k = \mathbb{D}_{u_k}(\rho_k)$. In our real experiment however, we also take into account decoherence and τ flying not-yet-detected samples and therefore choose u_k to minimize $V_0(\tilde{\rho}_k)$ for

$$\tilde{\rho}_k = \mathbb{D}_{u_k}(\mathbb{T}_\theta(\mathbb{K}^{u_{k-1},\theta}(\mathbb{K}^{u_{k-2},\theta}(\ldots\mathbb{K}^{u_{k-\tau},\theta}(\widehat{\rho}_k^{\mathrm{est}})\ldots))))$$

with $\widehat{\rho}^{\mathrm{est}}$ given by (29). Here we have introduced the Kraus map of the real experiment

$$\mathcal{D} \ni \rho \mapsto \mathbb{K}^{u,\theta}(\rho) = \sum_{\mu'=1}^{m'}\sum_{\mu=1}^{m} \eta_{\mu',\mu} L_\mu(\mathbb{D}_u(\mathbb{T}_\theta(\rho))) {L_\mu}^\dagger \in \mathcal{D}. \tag{30}$$

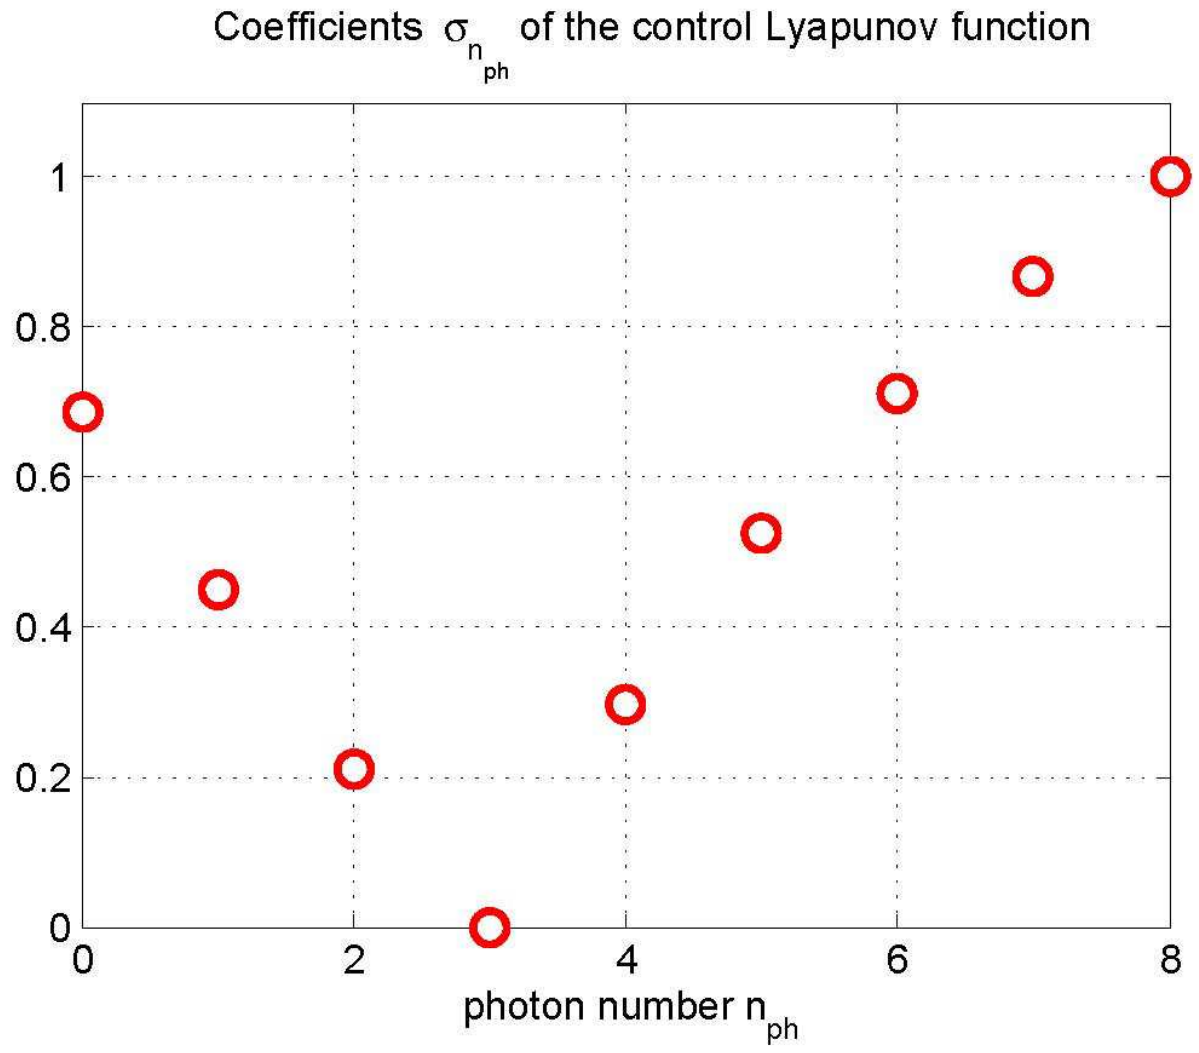

Figure 2: Coefficients of the Lyapunov function $V_0(\rho)$ used in the feedback for the simulations of figure 3 and for the experiment of figure 4.

To simplify the minimization of V_0 we use approximation (24) and get

$$V_0(\mathbb{D}_u(\rho)) \approx V_0(\rho) - \left(a_1 u + a_2 \frac{u^2}{2}\right) \tag{31}$$

with $a_1 = \text{Tr}([\mathbf{a}^\dagger - \mathbf{a}, \sigma_{\mathbf{N}}]\rho)$ and $a_2 = \text{Tr}([[\mathbf{a}^\dagger - \mathbf{a}, \sigma_{\mathbf{N}}], \mathbf{a}^\dagger - \mathbf{a}]\rho)$, where $\sigma_{\mathbf{N}}$ is the diagonal operator $\sum_{n_{\text{ph}}} \sigma_{n_{\text{ph}}} |n_{\text{ph}}\rangle \langle n_{\text{ph}}|$. The coefficients $\sigma_{n_{\text{ph}}}$ are computed using Lemma 2.2 where, for $n_{\text{ph}} \neq \bar{n}_{\text{ph}}$, $\lambda_{n_{\text{ph}}}$ are chosen negative and with a decreasing modulus versus n_{ph} in order to compensate cavity decay. For $\bar{n}_{\text{ph}} = 3$, we have compared in simulations different setting and selected the profile displayed in figure 2. The control u minimizing V_0 is then approximated by

$$\underset{\xi \in [-\bar{u}, \bar{u}]}{\text{argmax}} \left(a_1 \xi + a_2 \xi^2/2\right).$$

4.4 Simulations and experimental results

Closed-loop simulation of figure 3 shows one typical Monte-Carlo trajectory of the feedback loop aiming on the stabilization of the 3-photon state $|\bar{n}_{\text{ph}} = 3\rangle$. The typical values of experimental parameters used in the simulations are the following: $n_{\text{ph}}^{\max} = 8$, $\phi_0 = 0.245\,\pi$, $\phi_r = \pi/2 - \phi_0(\bar{n}_{\text{ph}} + 1/2)$, $\langle n_{\text{a}}\rangle = 0.6$, $\varepsilon = 0.35$, $\eta_e = 0.13$, $\eta_g = 0.11$, $T_{\text{p}} = 82\,\mu\text{s}$, $T_{\text{cav}} = 65$ ms, $n_{\text{th}} = 0.05$, and $\tau = 4$. For the feedback, $\sigma_{n_{\text{ph}}}$ are given in figure 2, $\epsilon = 0$ and $\bar{u} = 1/10$. The initial states ρ_0 and $\widehat{\rho}_0^{\text{est}}$ coincide with the coherent state with $\bar{n}_{\text{ph}} = 3$ photons: $\mathbb{D}_{\sqrt{\bar{n}_{\text{ph}}}}(|0\rangle \langle 0|)$.

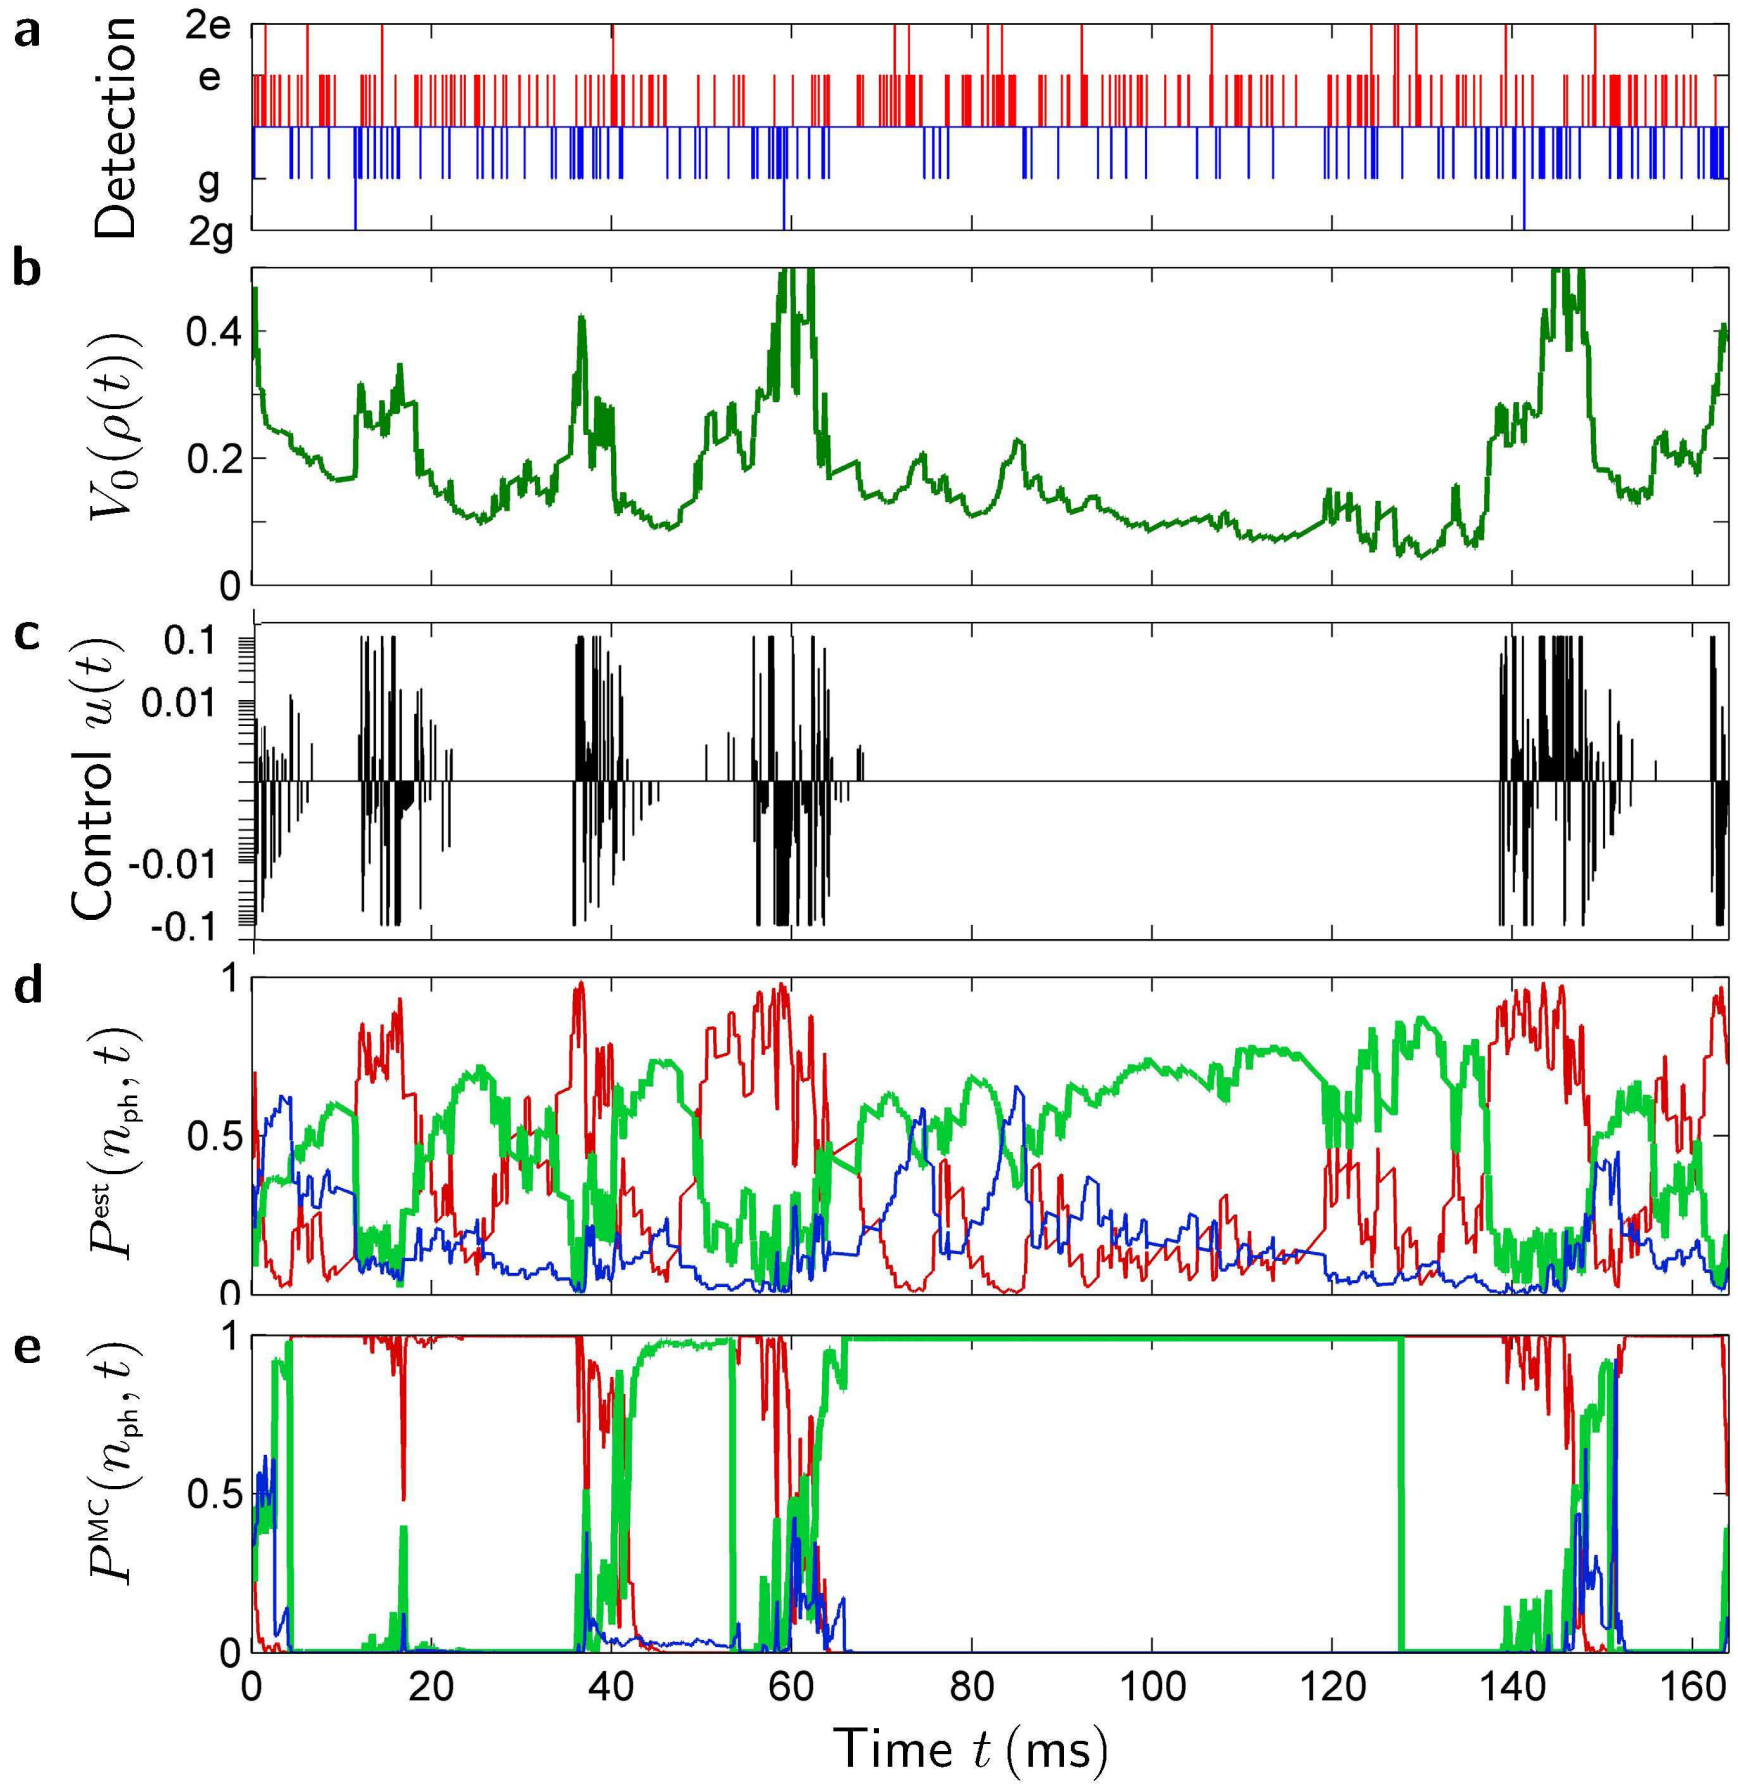

Figure 3: Simulation of one Monte-Carlo trajectory in closed-loop with the target state $|\bar{n}_{\text{ph}} = 3\rangle$. (a) Detection results. (b) Control Lyapunov function. (c) Control input. (d) Estimated photon number probabilities: $\sum_{n_{\text{ph}}<\bar{n}_{\text{ph}}} \langle n_{\text{ph}}| \widehat{\rho}^{\text{est}} |n_{\text{ph}}\rangle$ in red, $\langle \bar{n}_{\text{ph}}| \widehat{\rho}^{\text{est}} |\bar{n}_{\text{ph}}\rangle$ in thick green, and $\sum_{n_{\text{ph}}>\bar{n}_{\text{ph}}} \langle n_{\text{ph}}| \widehat{\rho}^{\text{est}} |n_{\text{ph}}\rangle$ in blue. (e) Cavity photon number probabilities: $\sum_{n_{\text{ph}}<\bar{n}_{\text{ph}}} \langle n_{\text{ph}}| \rho |n_{\text{ph}}\rangle$ in red , $\langle \bar{n}_{\text{ph}}| \rho |\bar{n}_{\text{ph}}\rangle$ in thick green, and $\sum_{n_{\text{ph}}>\bar{n}_{\text{ph}}} \langle n_{\text{ph}}| \rho |n_{\text{ph}}\rangle$ in blue.

The results of the experimental implementation of the feedback scheme are presented in figure 4. figure 4(e) shows that the average fidelity of the target state is about 47%. Besides, the asymmetry between the distributions for $n_{\rm ph} < \bar{n}_{\rm ph}$ and $n_{\rm ph} > \bar{n}_{\rm ph}$ indicates the presence of quantum jumps occurring preferentially downwards ($\bar{n}_{\rm ph} \to \bar{n}_{\rm ph} - 1$). Contrarily to the simulations of figure 3, the cavity photon numbers relying of ρ are not accessible in the experimental data of figure 4 since we do not have access to the true detections and to the cavity decoherence jumps. Nevertheless, green curves in figures 3(d) and 3(e) indicate that when $\langle \bar{n}_{\rm ph} | \widehat{\rho}^{\rm est} | \bar{n}_{\rm ph} \rangle$ exceeds 8/10, ρ coincides, with high probability, with the goal state $| \bar{n}_{\rm ph} \rangle \langle \bar{n}_{\rm ph} |$.

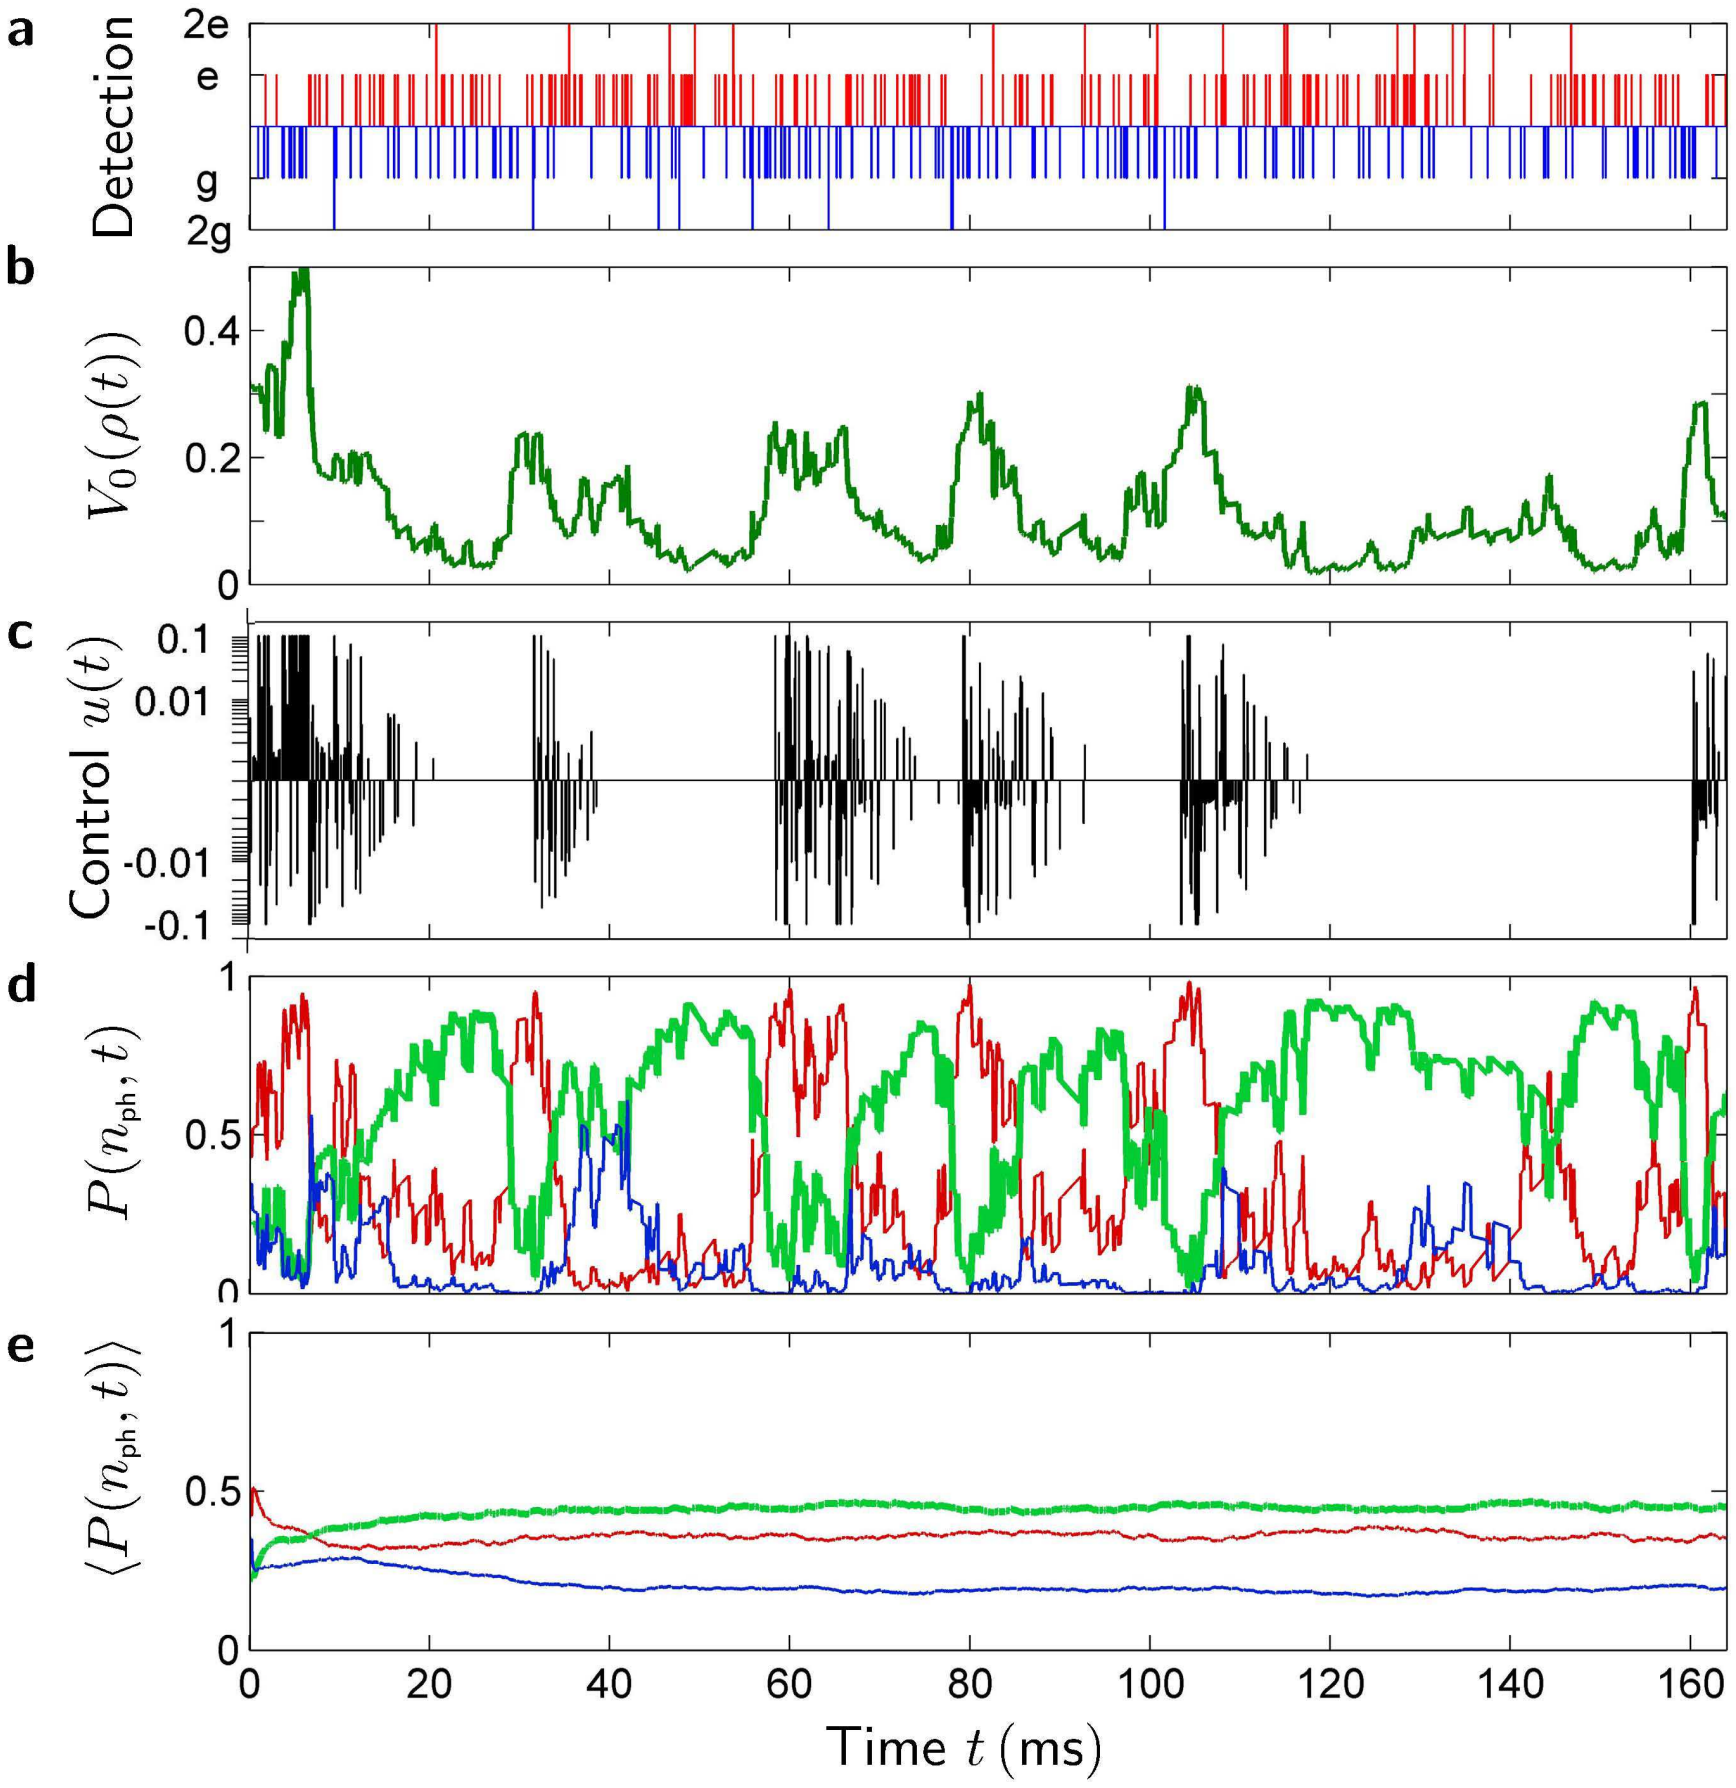

Figure 4: Single experimental trajectory of the feedback loop with the target state $|\bar{n}_{\rm ph} = 3\rangle$. (a) Detection results. (b) Evolution of the control function. (c) Control injection. (d) Estimated photon number probabilities: $\sum_{n_{\rm ph} < \bar{n}_{\rm ph}} \langle n_{\rm ph} | \widehat{\rho}^{\rm est} | n_{\rm ph} \rangle$ in red , $\langle \bar{n}_{\rm ph} | \widehat{\rho}^{\rm est} | \bar{n}_{\rm ph} \rangle$ in thick green, and $\sum_{n_{\rm ph} > \bar{n}_{\rm ph}} \langle n_{\rm ph} | \widehat{\rho}^{\rm est} | n_{\rm ph} \rangle$ in blue. (e) Estimated photon number probabilities averaged over 4000 experimental trajectories of the feedback loop.

5 Conclusion

We have proposed a Lyapunov design for state-feedback stabilization of a discrete-time finite-dimensional quantum system with QND measurements. Extensions of this design are possible in different directions such as

- replacing the continuous and mono-dimensional input u by a multi-dimensional one $(u_1, \dots, u_p)$;
- assuming that u belongs to a finite set of discrete values;
- taking an infinite dimensional state space as in [18] where the truncation to finite photon numbers is removed;
- considering continuous-time systems similar to the ones investigated in [12];
- ensuring convergence towards a sub-space instead of a pure-state and thus achieving a goal similar to error correction code as already proposed in [1].

Acknowledgments The authors thank Michel Brune, Serge Haroche and Jean-Michel Raimond for enlightening discussions and advices.

References

[1] C. Ahn, A. C. Doherty, and A. J. Landahl. Continuous quantum error correction via quantum feedback control. *Phys. Rev. A*, 65:042301, Mar 2002.

[2] H. Amini, M. Mirrahimi, and P. Rouchon. Stabilization of a delayed quantum system: the Photon Box case-study. *IEEE Trans. Automatic Control*, 2012. To appear (preliminary version arXiv:1007.3584).

[3] H. Amini, P. Rouchon, and M. Mirrahimi. Design of strict control-Lyapunov functions for quantum systems with QND measurements. In *50th IEEE Conference on Decision and Control and European Control Conference*, pages 8193–8198, 2011. Arxiv preprint arXiv:1103.1365.

[4] Michel Bauer and Denis Bernard. Convergence of repeated quantum nondemolition measurements and wave-function collapse. *Phys. Rev. A*, 84:044103, Oct 2011.

[5] L. Bouten and R. van Handel. *Quantum Stochastics and Information: Statistics, Filtering and Control*, chapter On the separation principle of quantum control. World Scientific, 2008.

[6] I. Dotsenko, M. Mirrahimi, M. Brune, S. Haroche, J.-M. Raimond, and P. Rouchon. Quantum feedback by discrete quantum non-demolition measurements: towards on-demand generation of photon-number states. *Phys. Rev. A*, 80: 013805-013813, 2009.

[7] J.M. Geremia. Deterministic and nondestructively verifiable preparation of photon number states. *Phys. Rev. Lett.*, 97(073601), 2006.

[8] J. Gough and M.R. James. The series product and its application to quantum feedforward and feedback networks. *IEEE Transactions on Automatic Control* , 54(11):2530 –2544, nov. 2009.

[9] S. Haroche and J.M. Raimond. *Exploring the Quantum: Atoms, Cavities and Photons.* Oxford University Press, 2006.

[10] M.R. James and J.E. Gough. Quantum dissipative systems and feedback control design by interconnection. *IEEE Transactions Automatic Control*, 55(8):1806 –1821, aug. 2010.

[11] H.J. Kushner. *Introduction to Stochastic Control.* Holt, Rinehart and Wilson, INC., 1971.

[12] M. Mirrahimi and R. Van Handel. Stabilizing feedback controls for quantum systems. *SIAM Journal on Control and Optimization*, 46(2):445–467, 2007.

[13] M.A. Nielsen and I.L. Chuang. *Quantum Computation and Quantum Information.* Cambridge University Press, 2000.

[14] K. Nishio, K. Kashima, and J. Imura. Effects of time delay in feedback control of linear quantum systems. *Phys. Rev. A*, 79:062105, Jun 2009.

[15] C. Sayrin. *Préparation et stabilisation d'un champ non classique en cavité par rétroaction quantique.* PhD thesis, Université Paris VI, 2011.

[16] C. Sayrin, I. Dotsenko, X. Zhou, B. Peaudecerf, Th. Rybarczyk, S. Gleyzes, P. Rouchon, M. Mirrahimi, H. Amini, M. Brune, J.M. Raimond, and S. Haroche. Real-time quantum feedback prepares and stabilizes photon number states. *Nature*, 477:73–77, 2011. doi:10.1038/nature10376.

[17] A. Somaraju, I. Dotsenko, C. Sayrin, and P. Rouchon. Design and stability of discrete-time quantum filters with measurement imperfections. *Submitted*, 2011. Arxiv preprint arXiv:1109.5344.

[18] A. Somaraju, M. Mirrahimi, and P. Rouchon. Approximate stabilization of an infinite dimensional quantum stochastic system. In *50th IEEE Conference on Decision and Control and European Control Conference*, pages 6248–6253, 2011. Arxiv preprint arXiv:1103.1724.

[19] H.M. Wiseman and A.C. Doherty. Optimal unravellings for feedback control in linear quantum systems. *Phys. Rev. Lett.*, 94(7):070405, 2005.

[20] H.M. Wiseman and G.J. Milburn. *Quantum Measurement and Control.* Cambridge University Press, 2009.

A Appendix

Theorem A.1. Let X_k be a Markov chain on the compact state space S. Suppose, there exists a non-negative function $V(X)$ satisfying

$$\mathbb{E}\left(V(X_{k+1})|X_k\right) - V(X_k) = -Q(X_k), \tag{32}$$

where $Q(X)$ is a positive continuous function of X, then the ω-limit set Ω (in the sense of almost sure convergence) of X_k is included in the following set

$$I_\infty = \{X| \quad Q(X) = 0\}.$$

Proof. The proof is just an application of the Theorem 1 in [11, Ch. 8], which shows that $Q(X_k)$ converges to zero for almost all paths. It is clear that the continuity of $Q(X)$ with respect to X and the compactness of S implies that the ω-limit set of X_k is necessarily included into the set I_∞. ☐

Proof of Lemma 2.3 The condition $Q_2 = 0$ implies that, for all n, μ, ν

$$\mathrm{Tr}\left(M_\nu^{\beta_1}\rho M_\nu^{\beta_1\dagger}\right)\langle n|\, M_\mu^{\beta_1}\rho M_\mu^{\beta_1\dagger}\,|n\rangle = \mathrm{Tr}\left(M_\mu^{\beta_1}\rho M_\mu^{\beta_1\dagger}\right)\langle n|\, M_\nu^{\beta_1}\rho M_\nu^{\beta_1\dagger}\,|n\rangle.$$

Taking the sum over all ν, we get, for all n and μ,

$$\langle n|\, M_\mu^{\beta_1}\rho M_\mu^{\beta_1\dagger}\,|n\rangle = \mathrm{Tr}\left(M_\mu^{\beta_1}\rho M_\mu^{\beta_1\dagger}\right)\langle n|\, \mathbb{K}^{\beta_1}(\rho)\,|n\rangle$$

Since $M_\mu^{\beta_1}$ and $\mathbb{K}^{\beta_1}$ are C^2 function of β_1, these relations read ($\rho_{n',n'} = \langle n'|\,\rho\,|n'\rangle$)

$$|c_{\mu,n}|^2\rho_{n,n} = \left(\sum_{n'}|c_{\mu,n'}|^2\rho_{n',n'}\right)\rho_{n,n} + \beta_1\ b_{\mu,n}(\rho,\beta_1) \tag{33}$$

where the scalar functions $b_{\mu,n}$ depend continuously on ρ and β_1.

Let us prove the lemma by contradiction. Assume that for all $C > 0$, there exists $(\rho^C, \beta_1^C) \in \mathcal{D}\times[-\widetilde{u},\widetilde{u}]$ satisfying $Q_2(\rho^C,\beta_1^C) = 0$, such that

$$\forall n \in \{1,\dots,d\},\ \rho_{n,n}^C \leq 1 - C|\beta_1^C|.$$

Take C tending towards $+\infty$. Since ρ^C and β_1^C remain in a compact set, we can assume, up to some extraction process, that ρ^C and β_1^C converge towards ρ^* and β_1^* in $\mathcal{D}$ and $[-\widetilde{u},\widetilde{u}]$. Since $|\beta_1^C| \leq (1-\rho_{n,n}^C)/C \leq 1/C$, we have $\beta_1^* = 0$. Since

$$|c_{\mu,n}|^2\rho_{n,n}^C = \left(\sum_{n'}|c_{\mu,n'}|^2\rho_{n',n'}^C\right)\rho_{n,n}^C + \beta_1^C\ b_{\mu,n}(\rho^C,\beta_1^C) \tag{34}$$

we have by continuity for $C \mapsto +\infty$

$$|c_{\mu,n}|^2\rho_{n,n}^* = \left(\sum_{n'}|c_{\mu,n'}|^2\rho_{n',n'}^*\right)\rho_{n,n}^*$$

for all n and μ. Thus there exists $n^* \in \{1, \dots, d\}$ such that $\rho^* = |n^*\rangle \langle n^*|$ (see the proof of Theorem 2.1). Since $\rho^*_{n^*,n^*} = 1$, for C large enough, $\rho^C_{n^*,n^*} > 1/2$ and thus

$$\left(\sum_{n'} |c_{\mu,n'}|^2 \rho^C_{n',n'} \right) = |c_{\mu,n^*}|^2 - \beta_1^C \; \frac{b_{\mu,n^*}(\rho^C, \beta_1^C)}{\rho^C_{n^*,n^*}}. \tag{35}$$

Taking $n \neq n^*$, by Assumption 2, there exists μ such that $|c_{\mu,n}|^2 \neq |c_{\mu,n^*}|^2$. Replacing (35) in (34) yields

$$\left(|c_{\mu,n}|^2 - |c_{\mu,n^*}|^2 + \beta_1^C \; \frac{b_{\mu,n^*}(\rho^C, \beta_1^C)}{\rho^C_{n^*,n^*}} \right) \rho^C_{n,n} = \beta_1^C \; b_{\mu,n}(\rho^C, \beta_1^C)$$

Thus, there exists $C_0 > 0$, such that for $n \neq n^*$ and C large enough

$$\rho^C_{n,n} \leq C_0 |\beta_1^C|.$$

But $\rho^C_{n^*,n^*} = 1 - \sum_{n \neq n^*} \rho^C_{n,n} \geq 1 - C_0(d-1)|\beta_1^C|$. This is in contradiction with $\rho^C_{n^*,n^*} \leq 1 - C|\beta_1^C|$ as soon as $C > C_0(d-1)$.